

# Forged steel valves gate, globe, and check



**ASME CLASSES 150 – 4500  
NPS 1/4 – 4 (DN 8 – 100)  
API 602/ASME B16.34**

**VELAN**

# VELAN'S PROFILE

## VELAN AT A GLANCE

### History

- Founded in 1950

### People

- Over 1,800 employees

### Product line

A world-leading range of valves across all major industrial applications:

- Cast steel gate, globe, check, and ball valves
- Forged steel gate, globe, check, and ball valves
- Triple-offset butterfly valves
- Knife gate valves
- Severe service valves
- Bellows seal valves
- Steam traps

### Primary industries served

- Fossil, nuclear, and cogeneration power
- Oil and gas
- Refining and petrochemicals
- Chemicals and pharmaceutical
- LNG and cryogenics
- Marine
- HVAC
- Mining
- Water and wastewater
- Pulp and paper
- Subsea

### Velan holds major applicable approvals:

- ASME Section III N and NPT for nuclear valves (since 1970)
- ISO 9001 (since 1991) and ISO 14001
- OHSAS 18001
- PED
- SIL
- GOST
- API 6A and API 6D
- TA-Luft
- Comprehensive quality programs that are compliant with the most stringent industry standards such as ISO 9001, API Q1, API 624, NCA 4000, ASME NQA-1, and 10 CFR 50 Appendix B.
- Velan has been surveyed and audited by leading organizations around the world such as Bureau Veritas, API, ASME, NUPIC, Newport News Shipbuilding, and DCMA.
- Total Process Improvement Program, including Lean Manufacturing and Six Sigma.



Velan is one of the world's leading manufacturers of cast and forged steel gate, globe, check, ball, triple-offset, knife gate, highly engineered severe service valves, and steam traps offering superior performance across all major industrial applications including: fossil, nuclear, and cogeneration power; oil and gas; refining and petrochemicals; chemicals and pharmaceutical; LNG and cryogenics; marine; HVAC; mining; water and wastewater; pulp and paper; and subsea. The company also supplies actuators and integrated control packages.

Founded in 1950, Velan has earned a reputation for product excellence and innovation by bringing to the market superior products with special emphasis on quality, safety, ease of operation, and long service life. Velan valves have an extremely broad installation base and are approved by major companies worldwide.

Velan concentrates on one business—the design, manufacture and marketing of steel valves and steam traps in a broad range of types and sizes for high performance service in a wide range of applications. The company's talented people are focused on Velan's core values of quality, reliability, innovation, and integrity and mission to be the world's leading valve brand.

## TABLE OF CONTENTS

Velan's global network .....	3
Manufacturing program .....	4
Semi-automatic assembly & testing plant .....	4
Exclusive design features .....	5
Packing chamber design .....	6
Low fugitive emission valves .....	7
Forged steel gate valves .....	8–9
Extended body gate valves .....	10
Conventional port globe valves .....	11
Conventional port bonnetless y-pattern globe valves .....	12
Conventional port 45° inclined globe valves .....	13
Conventional port check valves including piston, ball or swing check .....	14
Inclined piston check valves .....	15
Special services—valves for nuclear including live-loaded gate and globe .....	16
Special services—hermetically sealed bellows seal valves .....	17
Special services—boiler plant service valves .....	18
Special services—continuous blowdown valves .....	19
Special services—forged cryogenic valves .....	20
Special services—HF acid valves .....	21
Special services—fabricated valves .....	22
Engineering data .....	23–34
How to order .....	35

# VELAN'S GLOBAL NETWORK

## Head office



Montreal, Canada  
Velan Inc.

- 13 production facilities
- 4 plants in North America
- 4 plants in Europe
- 5 plants in Asia

- 2 stocking and distribution centers
- Hundreds of distributors worldwide
- Over 60 service shops worldwide

## Manufacturing plants

### North America



Montreal, Canada  
Velan Inc., Plant 1 and 5

### Europe



Lyon, France  
Velan SAS

### Asia



Ansan City, South Korea  
Velan Ltd., Plant 1

## Distribution centers



Missouri City, TX, U.S.A.  
Velan Valve Corp.



Willich, Germany  
Velan GmbH



Montreal, Canada  
Velan Inc., Plant 2 and 7



Mennecy, France  
Segault SAS



Ansan City, South Korea  
Velan Ltd., Plant 2



Granby, Canada  
Velan Inc., Plant 4 and 6



Lisbon, Portugal  
Velan Válvulas Industriais, Lda.



Taichung, Taiwan  
Velan Valvac Mfg. Co., Ltd.



Williston, VT, U.S.A.  
Velan Valve Corp., Plant 3



Lucca, Italy  
Velan ABV S.r.l.



Suzhou, China  
Velan Valve (Suzhou) Co., Ltd.



Coimbatore, India  
Velan Valves India Pvt. Ltd.

– ASME N-stamp accredited manufacturer

# MANUFACTURING PROGRAM

**Small forged steel valves in carbon, alloy, and stainless steel  
NPS 1/4–4 (DN 8–100)**

Valve type	Bonnet type	Bonnet joint	Flanged ends	Threaded or socket weld		Butt weld ends	Male / female extended ends
				Conventional port	Full port		
<b>GATE</b>	OS & Y	Bolted	150, 300, 600, 1500, 2500	800, 1500, 1690	800, 1500	800, 1500, 2500	800
	OS & Y	Welded	150, 300, 600, 1500, 2500	800, 1500, 1690, 2500, 4500	800	800, 1500, 2500	800, 1500
<b>GLOBE</b>	OS & Y	Bolted	150, 300, 600, 1500	800, 1500, 1690	—	800, 1500	—
	OS & Y	Welded	150, 300, 600, 1500	800, 1500, 1690	—	800, 1500	—
	OS & Y	Y-pattern	1500, 2500	1690, 2680, 4500	1690, 2680, 4500	1690, 2680, 4500	—

Valve type	Type	Cover joint	Flanged ends	Threaded or socket weld		Butt weld ends
				Conventional port ends	Butt weld ends	
<b>CHECK</b>	Piston	Bolted	150, 300, 600, 1500	800, 1500	800, 1500	800, 1500
	Piston	Welded	150, 300, 600, 1500	800, 1500	800, 1500	800, 1500
	Ball	Bolted	150, 300, 600	800, 1500	800, 1500	800, 1500
	Swing	Bolted	150, 300, 600	800	—	—
	Swing	Coverless	—	800	—	—
	Inclined piston	Welded	1500, 2500	1690, 2680, 4500	1690, 2680, 4500	1690, 2680, 4500


## SEMI-AUTOMATIC ASSEMBLY AND TESTING PLANT



# EXCLUSIVE DESIGN FEATURES

## Stronger, leakproof body-bonnet joint fully encased spiral wound gasket

The design of the gasketed joint is critical. Its compression is better controlled in a fully enclosed cavity. Also, the possibility of unwinding of the SS spiral metal is eliminated.



## Stronger bolting ensures joint tightness

Simple stress vs. deflection tests conducted on spiral wound gaskets in our laboratory confirmed that the control of leakage is highly dependent on gasket seating stress and that the values shown in the **ASME Section III Code**, namely the seating factor  $m = 3$  and the seating stress  $y = 10,000$  psi used in calculating bolt sizes, are highly insufficient.



Our bolted joints are calculated to a minimum gasket stress of 16,000 psi which is essential for a leakproof joint. Our fugitive emissions qualification test demonstrated less than 20 ppm performance from gasket joints.

Gasket OD	Seating factor = m		Seating stress PSI = y	
	ASME	VELAN	ASME	VELAN
2 – 5.5"	3	7	10,000	16,000 – 28,000

## Threaded-in strength welded bonnets (full-penetration welds on special orders only)

Valves with threaded-in strength welded bonnet offer an additional level of safety against fugitive emissions.


The body-bonnet welds are made on fully automatic MIG Welders. Weld hardness is controlled (including the heat-affected zone) and maintained below 200 HB.



**Note:** CoCr alloy as used throughout this catalog refers to cobalt chrome hardfacing alloys as supplied by Kennametal Stellite™, and other approved manufacturers.

## Safer and tighter stem seal


- Stem hardened and ground.
- Two-piece self-aligning gland.
- Each packing ring individually inserted and compressed for better tightness.
- Sturdy full-length threaded corrosion-resistant bolts provide the required high packing stress.
- Live-loading optional.
- Positive backseat: stem bevel against integral backseat.



## Two-piece stem drive renewable in-line


This exclusive and handy feature found only on Velan small forged OS & Y gate valves enables:

- Replacement of stem nut in-line.
- Removal of handwheel without affecting the position of valve (closed or open).
- Better stem nut lubrication control.



## Body-guided disc in globe stop, needle and stop-check valves eliminates side thrust on stem

The top-and-bottom guided disc assures perfect seat and disc alignment in spite of side thrust caused by high velocity flow. This prevents stem from scoring and galling and provides longer disc seal and body life.

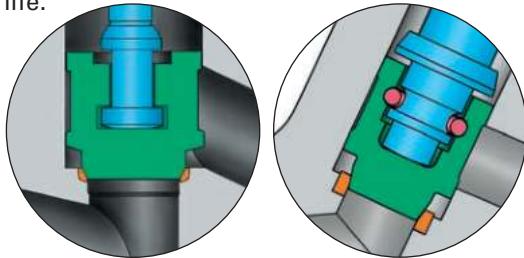


Solid CoCr alloy disc for full CoCr alloy trim

Solid CoCr alloy disc for all y-pattern valves

## Body-guided disc in piston-check valves

- Assures perfect alignment of disc and seat even at large flow velocities.
- Flat seating faces for low and medium pressures.




# DESIGN OF STEM SEALS FOR LOW EMISSIONS

## Test results lead to design of long-life leakproof stem seal



Our valves meet the most stringent national and international standards for fugitive emissions including API 624 and ISO 15848-1.

- Lower compression packing design reduces friction and allows more room to re-torque in the field.
- Rugged packing gland to withstand continued field maintenance and provides lower total cost of ownership.
- Optimized packing ring construction for excellent sealing and a corrosion inhibitor which demonstrated no corrosion indication based on API 622 tests.
- Short and narrow packing chambers improve sealing.
- Small clearances between vital parts.
- Precision stem and packing chambers. Straightness, roundness and fine finish of stem and packing chamber wall are essential. (Burnished surface finish of typically 16 RMS or better for the stem and packing chamber.)

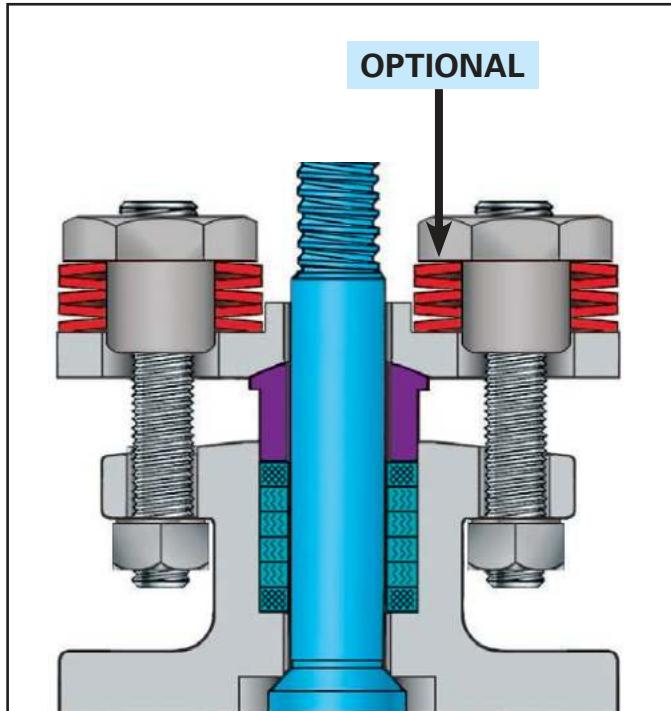

Photos illustrate packing machine and bonnet assembly machine.

# FUGITIVE EMISSION QUALIFICATION

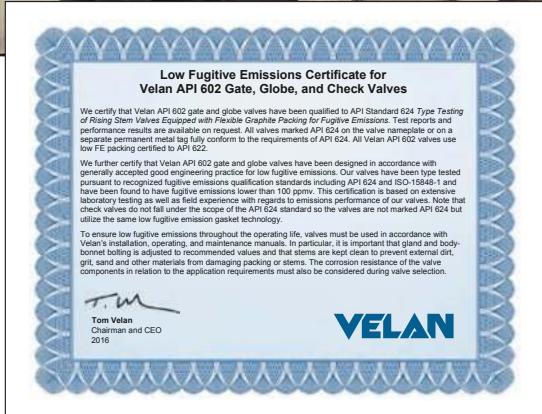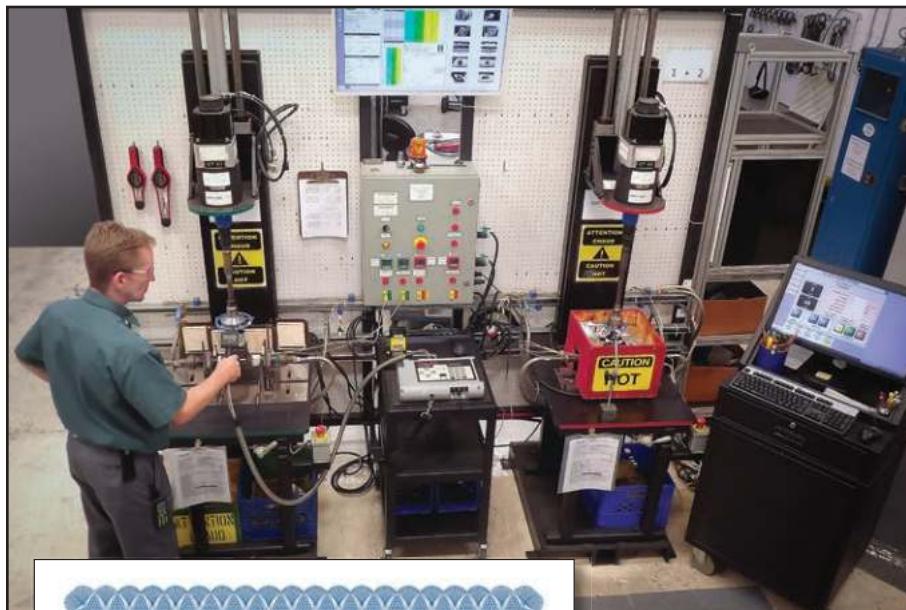

*Velan R&D test reports and performance results are available on request and on velan.com. All valves marked API 624 on the valve nameplate or on a separate permanent metal tag fully conform to the requirements of API 624. All Velan API 602 valves use low FE packing certified to API 622.*

## API Standard 622 FE test in a test fixture

We certify that all Velan API 602 valves use 100 ppm low FE packing, which have been tested to API 622 specification for FE, corrosion and material.

## API Standard 624 FE type test in a valve

We certify that Velan API 602 valves have been qualified to API Standard 624 Type Testing of Rising Stem Valves Equipped with Flexible Graphite Packing for Fugitive Emissions. Test reports and performance results are available upon request. Note that valves greater than 24" and API 594 check valves do not fall under the scope of the API 624 standard so the valves are not marked API 624, but utilize the same low fugitive emission technology.

## ISO 15848-1 type test and ISO 15848-2 production tests

In addition to API 624 qualification, Velan has also dual qualified its API 602 valves to ISO 15848-1 class A with methane gas.

Contact us for specific solutions regarding ISO 15848-1 with Helium gas as well ISO 15848-2 production test requirements.

- In a typical petroleum plant, 60% of fugitive emissions are from valves. Therefore it is extremely important to reduce valve emissions to the greatest degree possible.

- The four widely recognized standards regarding valve fugitive emissions are API 622, API 624, ISO 15848-1, and ISO 15848-2.

- The primary intention of API 622 is to compare performance of different packing brands, from the perspective of FE, stem corrosion and packing material properties. These tests are typically performed in test fixtures.

- The primary intention of API 624 is to type test multi-turn valve designs equipped with graphite packing, from the perspective of 100 ppm FE using Methane gas and EPA method 21. Methane gas is industry recognized to be representative of hydrocarbon gases typically used in refineries.

- The primary intention of ISO 15848-1 is to type test the valve design for FE using either Helium or Methane gas. This specification provides numerous testing parameters and FE performance options, which need to be specified or agreed between valve buyer and manufacturer.

- The primary intention of ISO 15848-2 is to inspect FE performance of newly produced valves, in production and from a QA/QC perspective.




*All our FE qualification reports are either third party witnessed or performed at an independent laboratory.*


# VELAN FORGED STEEL GATE VALVES

## THREADED, SOCKET WELD AND FLANGED


NPS 1/4–2 (DN 8–50), ASME CLASS 800 (1975 psi @ 100°F),  
ASME CLASS 1500 (3705 psi @ 100°F), FLANGED ASME CLASSES 150, 300, 600, 1500

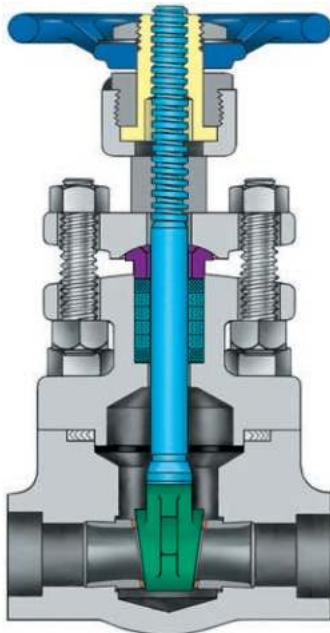

BOLTED BONNET  
2054B – Class 800  
3054B – Class 1500

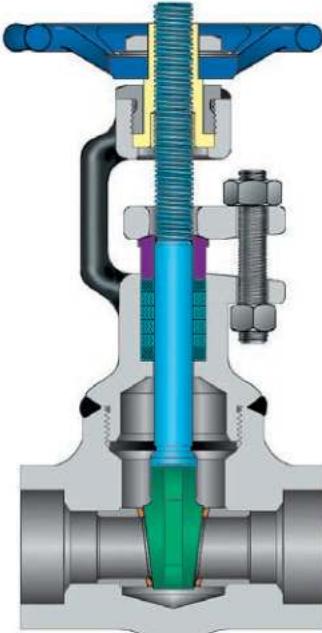

WELDED BONNET  
2054W – Class 800  
3054W – Class 1500

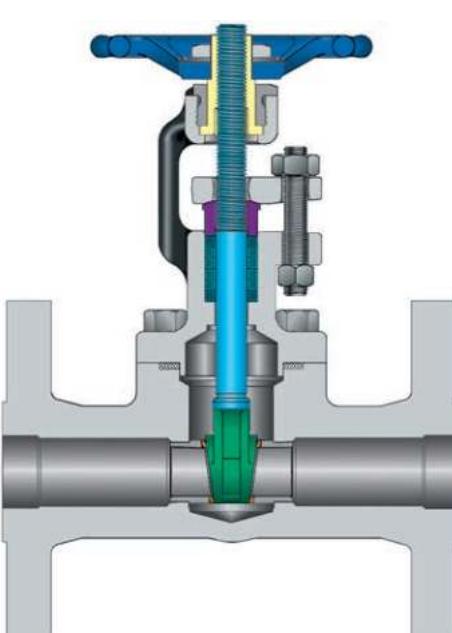

FLANGED BOLTED BONNET  
0054B – Class 150      2054B – Class 600  
1054B – Class 300      3054B – Class 1500

## DESIGN FEATURES

- Complies to API 602 and ASME B16.34 standards.
- A compact but extremely sturdy design for high pressure-temperature service.
- Solid CoCr alloy wedge (optional) ensures low friction and long service life.
- Packing rings are pre-compressed in the packing chamber to ensure equal stress distribution, effectiveness of all rings and a high integrity seal.
- For welded bonnet valves, the bonnet is threaded in and torqued to an engineered torque value and the body/bonnet joint is strength-welded, offering double protection against leakage. (body/bonnet threads and strength-weld).
- Fully guided wedge reduces wear on seating surfaces.
- Repairable 2-piece stem drive.

## OPTIONAL FEATURES (SPECIAL APPLICATIONS)

- For highly critical applications or situations where the valve end connections may undergo non-mandatory PWHT, seal-welded seat rings are available as a factory option.
- A special design is also available with double packing, leak-off connection, live-loading and a packing blowout for easy removal of old packing.
- Bolted bonnet gate valves for alkylation service (HF acid service see page 21).
- Parallel slide gate valves.
- API 603 NPS 1/2–1½ (DN 15–40), for ASME Classes 150, 300, and 600.

PART	STANDARD MATERIALS
Body	A105
Bonnet	A105
Gasket	Gr. 304 (stainless & graphite)
Packing flange	A105
Seat	Gr. 410 (stainless) HF CoCr alloy
Wedge	CA15 HT or CoCr alloy
Stem	Gr. 410 (stainless)
Stem nut	Gr. 416 (stainless)
Yoke bushing	12L14 steel
Gland	Gr. 416 (stainless)
Packing	Graphite
Gland bolt	Gr. B6
Gland nut	Gr. 2H
Cap screw	Gr. B7
Handwheel	Malleable iron
Handwheel nut	Steel
Handwheel lockwasher	Steel
Name plate	Aluminum

For other materials, trims, and engineering data, see pages 23–35.

# VELAN FORGED STEEL GATE VALVES

## BOLTED BONNET GATE DIMENSIONS AND WEIGHTS

Size NPS DN	A		B		C		D		H		K		L		Weight	
	Port		End-to-end		Center-to-top, closed		Center-to-top, open		Handwheel		Socket weld bore		Socket weld depth		lb kg	
	800	1500	800	1500	800	1500	800	1500	800	1500	800	1500	800	1500	800	1500
1/4 (1) 8	0.25	0.25	3.13	4.00	4.81	7.13	5.31	7.75	3.00	3.50	0.555	0.38	3.30	11.00		
	6	6	80	102	122	181	135	197	76	89	14.1	9.5	1.5	5.0		
3/8 (1) 10	0.25	0.35	3.13	4.00	4.81	7.13	5.31	7.75	3.00	3.50	0.690	0.38	3.30	11.00		
	6	9	80	102	122	181	135	197	76	89	17.5	9.5	1.5	5.0		
1/2 (1) 15	0.38	0.50	3.13	4.00	4.81	7.13	5.31	7.75	3.00	3.50	0.855	0.38	3.30	11.00		
	10	13	80	102	122	181	135	197	76	89	21.7	9.5	1.5	5.0		
3/4 20	0.50	3.25	5.00	5.91	7.25	6.75	7.88	3.50	3.50	1.065	0.50	5.30	13.00			
	13	83	127	150	184	171	200	89	89	27.1	12.7	2.4	5.9			
1 25	0.69	3.50	6.00	6.38	7.80	7.38	9.63	3.50	5.00	1.330	0.50	6.40	26.00			
	18	89	152	162	221	188	244	89	127	33.8	12.7	2.9	5.9			
11/4 32	1.25	5.00	7.00	7.77	9.12	9.12	10.63	4.75	6.00	1.675	0.50	15.00	34.00			
	32	127	178	197	232	232	270	121	152	42.5	12.7	6.8	15.4			
1 1/2 40	1.25	5.00	7.00	7.77	9.12	9.12	10.63	4.75	6.00	1.915	0.50	15.00	34.00			
	32	127	178	197	232	232	270	121	152	48.6	12.7	6.8	15.4			
2 50	1.50	5.25	9.00	8.70	10.56	10.40	12.30	6.00	10.00	2.406	0.63	19.00	58.00			
	38	133	229	221	268	264	312	152	254	61.1	15.9	8.6	26.3			

(1) Only for A105 (carbon) and A182 (stainless F316/F316L) body material in socket weld, threaded, butt weld or combination weld ends and 800 pressure class.

All other materials in 800 pressure class, refer to the NPS  $\frac{3}{4}$  (DN 20) design.

## **FLANGED FACE-TO-FACE**

<b>Size</b>	<b>Flanged face-to-face</b>				
<b>NPS DN</b>	<b>150</b>	<b>300</b>	<b>600</b>	<b>1500</b>	<b>2500</b>
1/4 <sup>(2)</sup> 8	4.00 102	5.50 139	6.50 165	8.50 216	—
3/8 <sup>(2)</sup> 10	4.00 102	5.50 139	6.50 165	8.50 216	—
1/2 <sup>(2)</sup> 15	4.25 108	5.50 139	6.50 165	8.50 216	10.38 264
3/4 <sup>(2)</sup> 20	4.62 117	6.00 152	7.50 191	9.00 229	10.75 273
1 25	5.00 127	6.50 165	8.50 216	10.00 254	12.12 308
1 1/4 32	5.50 140	7.00 178	9.00 229	11.00 279	13.75 349
1 1/2 40	6.50 165	7.50 191	9.50 241	12.00 305	15.12 384
2 50	7.00 178	8.50 216	11.50 292	14.50 368	17.75 451


(2) Only for A105 (carbon) and A182 (stainless F316/F316L) body material in RF end connections, bolted bonnet design and pressure classes 150, 300, and 600.

All other materials in pressure classes 150, 300, and 600, refer to the NPS  $\frac{3}{4}$  (DN 20) design.

## BOLTED BONNET GATE FULL PORT DIMENSIONS AND WEIGHTS

Size NPS DN	A Port	B		C		D		H		K Socket weld bore	L Socket weld depth	Weight			
		End-to-end		Center-to-top, closed		Center-to-top, open		Handwheel				lb	kg		
		800	1500	800	1500	800	1500	800	1500			800	1500		
1/4 8	0.25 6	3.25 83	4.00 102	5.90 150	7.10 180	6.63 168	7.8 198	3.50 89	3.50 89	0.555 14.1	0.38 14.1	6.20 2.8	10 4.5		
3/8 10	0.35 9	3.25 83	4.00 102	5.90 150	7.10 180	6.63 168	7.8 198	3.50 89	3.50 89	0.690 17.5	0.38 9.5	6.20 2.8	10 4.5		
1/2 15	0.50 13	3.25 83	4.00 102	5.90 150	8.7 221	6.63 168	7.88 200	3.50 89	3.50 89	0.855 21.7	0.38 9.5	6.20 2.8	12.00 5.4		
3/4 20	0.69 18	3.50 89	6.00 152	6.40 162	9.10 231	7.40 188	9.60 244	4.75 121	4.75 121	1.065 27.1	0.50 12.7	6.60 3.0	24.00 10.9		
1 25	0.96 24	5.00 127	7.00 178	7.80 198	9.10 231	9.10 231	10.60 269	6.00 152	6.00 152	1.330 33.8	0.50 12.7	15.00 6.8	32.00 14.5		
1 1/4 32	1.25 32	5.00 127	7.00 178	7.80 198	9.10 231	9.10 231	10.60 269	6.00 152	6.00 152	1.675 42.5	0.50 12.7	15.00 6.8	32.00 14.5		
1 1/2 40	1.50 38	5.25 133	9.00 229	8.60 218	10.60 269	10.40 264	12.30 312	6.00 152	10.00 254	1.915 48.6	0.50 12.7	20.00 9.1	50.00 22.7		
2 50	2.00 <sup>(3)</sup> 51	6.00 152	9.00 229	10.90 277	11.50 292	13.12 333	13.75 349	8.00 203	10.00 254	2.406 61.1	0.63 15.9	24.00 10.9	60.00 27.2		

(3) 1.89" (48 mm) Class 1500

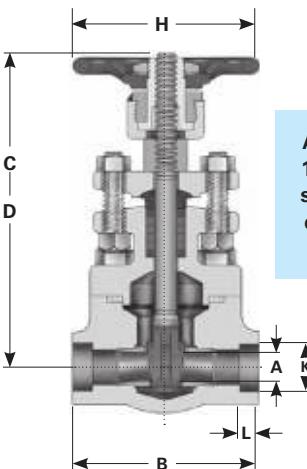

**Also see page  
17 for bellows  
seal valves for  
emission-free  
service.**

## **WELDED BONNET GATE VALVE DIMENSIONS AND WEIGHTS**

Size	A Port		B End-to-end		C Center- to-top, closed	D Center-to- top, open	H Hand- wheel	K Socket weld bore	L Socket weld depth	Weight lb kg			
					800	1500	800	1500	800	1500	800	1500	800
1/4 <sup>(4)</sup>	0.25	2.88	3.5	4.63	6.4	5.13	7.1	3	3.5	0.555	0.38	2.5	6.5
8	6	73	89	117	163	130	180	76	89	14.1	9.5	1.1	2.9
3/8 <sup>(4)</sup>	0.25	2.88	3.5	4.63	6.4	5.13	7.1	3	3.5	0.69	0.38	2.5	6.5
10	6	73	89	117	163	130	180	76	89	17.5	9.5	1.1	2.9
1/2 <sup>(4)</sup>	0.38	2.88	3.5	4.63	6.4	5.13	7.1	3	3.5	0.855	0.38	2.5	6.5
15	10	73	89	117	163	130	180	76	89	21.7	9.5	1.1	2.9
3/4	0.5	3.25	3.5	5.9	6.4	6.63	7.1	3.5	3.5	1.065	0.50	4.4	6.8
20	13	83	89	150	163	168	180	89	89	27.1	12.7	2	3.1
1	0.69	3.5	5	6.3	8.1	7.2	8.9	3.5	4.75	1.330	0.50	5.3	13
25	18	89	127	160	206	182	226	89	121	33.8	12.7	2.4	5.9
1 1/4	1.25	5	5.25	7.77	9.4	9.12	10.8	4.75	6	1.675	0.50	11	20
32	32	127	133	197	239	231	274	121	152	42.5	12.7	5	9.1
1 1/2	1.25	5	5.25	7.77	9.4	9.12	10.8	4.75	6	1.915	0.50	11	20
40	32	127	133	197	239	231	274	121	152	48.6	12.7	5	9.1
2	1.5	5.25	10	8.5	12.4	10.4	14.1	6	10	2.406	0.63	16	50
50	38	133	254	216	315	264	358	152	254	61.1	15.9	7.3	22.7

## **WELDED BONNET FULL PORT GATE VALVE DIMENSIONS AND WEIGHTS**

Size NPS DN	A		B		C		D		H		K	L	Weight	
	Port	End-to-end		Center-to-top, closed		Center-to- top, open		Hand- wheel		Socket weld bore	Socket weld depth	lb kg		
		800	1500	800	1500	800	1500	800	1500			800	1500	
½ <sup>(4)</sup>	0.5	3.25	3.5	5.9	6.4	6.7	7.1	3.5	3.5	0.855	0.38	4.4	6.8	
15	13	83	89	150	163	170	180	89	89	21.7	9.5	2	3.1	
¾	0.69	3.5	5	6.2	8	7	8.8	4.8	4.8	1.065	0.50	5.3	14	
20	18	89	127	157	203	178	224	122	122	27.1	12.7	2.4	6.4	
1	0.96	5	5.25	7.8	9.4	9.1	10.8	6	6	1.330	0.50	11	20	
25	24	127	133	198	239	231	274	152	152	33.8	12.7	5	9.1	
1¼	1.25	5	5.25	7.8	9.4	9.1	10.8	6	6	1.675	0.50	11	20	
32	32	127	133	198	239	231	274	152	152	42.5	12.7	5	9.1	
1½	1.5	5.25	10	8.8	12.4	10.4	14.1	6	10	1.915	0.50	16	50	
40	38	133	254	224	315	264	358	152	254	48.6	12.7	7.3	22.7	
2	2	6	10	10.9	12.1	13.1	14.3	8	10	2.406	0.62	21	60	
50	51	152	254	277	307	332	363	203	254	61.1	15.7	9.5	27.2	

(4) Only for A105 (carbon) body material in socket weld, threaded, butt weld or combination weld ends and 800 pressure class.

All other materials in 800 pressure class, refer to the  $\frac{3}{4}$ " design.


# VELAN FORGED STEEL EXTENDED BODY GATE VALVES

## CONVENTIONAL PORT, THREADED OR SOCKET WELD FEMALE

NPS ½–2 (DN 15–50), API 602, ASME CLASSES 800, 1500



INTEGRALLY-REINFORCED  
EXTENDED BODY – 2174W

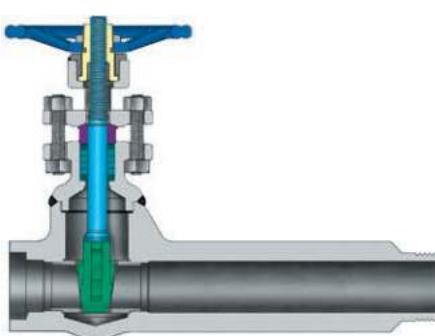

EXTENDED BODY – 2184W

PART	STANDARD MATERIALS
Body	A105
Bonnet	A105
Packing flange	A105
Seat	Gr. 410 (stainless) HF CoCr alloy
Wedge	CA15 HT or CoCr alloy
Stem	Gr. 410 (stainless)
Stem nut	Gr. 416 (stainless)
Yoke bushing	Steel
Gland	Gr. 416 (stainless)
Packing	Graphite
Gland bolt	Gr. B6 (stainless)
Gland nut	Gr. 2H
Handwheel	Malleable iron
Handwheel nut and lockwasher	Steel
Name plate	Aluminum

For other materials, trims, and engineering data, see pages 23–35.

### TWO TYPES

- Complies to API 602 and ASME B16.34 standards.
- This valve is available with an extended body or an integrally-reinforced extended body (IREB).
- Extended body gate valves have a welded or NPT connection and are used for tapping of pressure vessels and header lines for vents, drains or takeoff lines and instrumentation.
- Also available: extended body assemblies for vents, drains, and instrument root valves.

### AVAILABLE VARIATIONS<sup>(2)</sup>

FAMILY STANDARD END	MALE EXTENDED END	
	Standard: 2184W, 3184W	IREB: 2174W, 3174W
Thread	Couplet, NPT, or Socket	Couplet, NPT, socket weld (plain), butt weld
Socket weld	Couplet or Socket	

### EXTENDED BODY GATE VALVE DIMENSIONS AND WEIGHTS

Size NPS DN	A Port	B End-to-end		C Center-to-top, closed		D Center-to-top, open		H Handwheel		K Socket weld bore	L Socket weld depth	DA Short end-to-center		DB Long end-to center		Weight	
				800 & 1500	800	1500	800	1500	800			800	1500	800	1500	800	1500
½ 15	0.50 <sup>(1)</sup> 13	5.63 143	5.75 146	5.90 150	6.4 163	6.6 168	7.14 181	3.50 89	3.50 89	0.855 21.7	0.38 9.5	1.63 41	1.75 44	4.00 102	4.00 102	5.0 2.3	7.7 3.5
¾ 20	0.50 13	5.63 143	5.75 146	5.90 150	6.4 163	6.6 168	7.14 181	3.50 89	3.50 89	1.065 27.1	0.50 12.7	1.63 41	1.75 44	4.00 102	4.00 102	5 2.3	8.8 4.0
1 25	0.69 18	5.75 146	7.25 184	6.4 163	8.1 206	7.4 188	8.9 226	3.50 89	4.75 121	1.33 33.8	0.50 12.7	1.75 44	2.50 64	4.00 102	4.75 121	6.1 2.8	17.00 7.7
1¼ 32	1.25 32	7.00 178	— —	7.6 193	— 234	— —	9.2 121	4.75 121	— 42.5	0.50 12.7	2.25 57	— 57	4.75 121	— —	13 6	— —	
1½ 40	1.25 32	7.25 184	7.88 200	7.6 193	9.40 239	9.2 234	10.8 274	4.75 121	6.00 152	1.915 48.6	0.50 12.7	2.5 64	2.63 67	4.75 121	5.25 133	13.00 6	24.00 11
2 50	1.50 38	7.88 200	12.25 311	8.8 224	12.40 315	10.50 267	14.10 358	6.00 152	10.00 254	2.406 61.1	0.63 15.9	2.63 67	5.00 127	5.25 133	7.25 184	19.00 9	55.00 25

### IREB GATE VALVE DIMENSIONS AND WEIGHTS

Size NPS DN	A Port	B End-to-end		C Center-to-top, closed		D Center-to-top, open		H Handwheel		K Socket weld bore	L Socket weld depth	DA Short end-to-center		DB Long end-to center		Weight	
				800 & 1500	800	1500	800	1500	800			800	1500	800	1500	800	1500
½ 15	0.50 <sup>(1)</sup> 13	8.63 219	8.88 226	5.90 150	6.4 163	6.63 168	7.14 181	3.50 89	3.50 89	0.855 21.7	0.38 9.5	1.63 41	1.75 44	7.00 178	7.13 181	6.6 3.0	8.8 4.0
¾ 20	0.50 13	8.63 219	8.88 226	5.90 150	6.4 163	6.63 168	7.14 181	3.50 89	3.50 89	1.065 27.1	0.50 12.7	1.63 41	1.75 44	7.00 178	7.13 181	6.6 3.0	10 4.5
1 25	0.69 18	9.38 238	10.13 257	6.4 163	8.1 206	7.4 188	8.9 226	3.50 89	4.75 121	1.33 33.8	0.50 12.7	1.75 44	2.50 64	7.63 194	7.63 194	7.7 3.5	20 9.1
1¼ 32	1.25 32	10.50 266	10.63 270	7.6 193	9.4 239	9.2 234	10.8 274	4.75 121	6.00 152	1.675 42.5	0.50 12.7	2.50 64	2.63 67	8.00 203	8.00 203	15 6.8	30 14
1½ 40	1.25 32	10.50 266	10.63 270	7.6 193	9.4 239	9.2 234	10.8 274	4.75 121	6.00 152	1.915 48.6	0.50 12.7	2.50 64	2.63 67	8.00 203	8.00 203	15 6.8	30 14
2 50	1.50 38	11.88 302	14.25 362	8.8 224	12.4 315	10.50 267	14.1 358	6.00 152	10.00 254	2.406 61.1	0.63 15.9	2.63 67	5.00 127	9.25 235	9.25 235	25 11.3	66 30

(1) 0.36" (9 mm) seat for ½" NPT male end only.

(2) Bolted bonnet also available.


# VELAN FORGED STEEL GLOBE VALVES

## CONVENTIONAL PORT, THREADED OR SOCKET WELD

NPS 1/4–2 (DN 8–50), ASME CLASS 800 (1975 psi @ 100°F), ASME CLASS 1500 (3705 psi @ 100°F)


FLANGED ASME CLASSES 150, 300, 600, 1500

COMPLIES TO API 602 AND ASME B16.34 STANDARDS

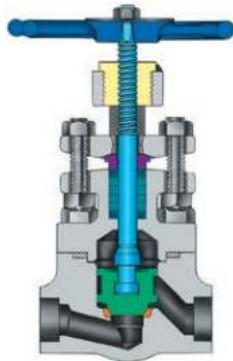


**BOLTED BONNET**

2074B – Class 800  
3074B – Class 1500

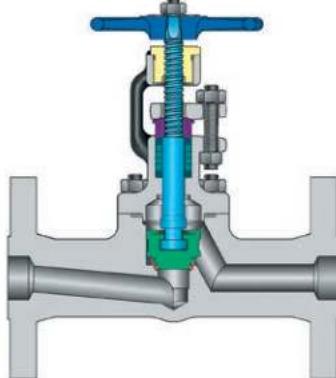

**FLANGED BOLTED BONNET**

0074B – Class 150 2074B – Class 600  
1074B – Class 300 3074B – Class 1500

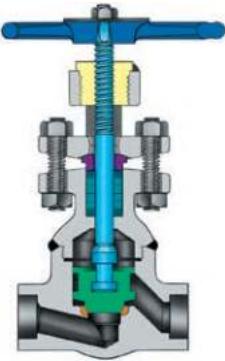

**WELDED BONNET**

2074W – Class 800  
3074W – Class 1500

PART	STANDARD MATERIALS
Body	A105
Seat (integral)	CoCr alloy
Bonnet	A105
Gasket	Gr. 304 (stainless and graphite)
Packing flange	A 105
Disc	CA15 HT or CoCr alloy
Stem	Gr. 410 (stainless)
Stem nut	Gr. 416 (stainless) or bronze
Gland	Gr. 416 (stainless)
Packing	Graphite
Gland bolt	Gr. B6
Gland nut	Gr. 2H
Cap screw	Gr. B7
Handwheel	Malleable iron
Handwheel lockwasher	Steel
Name plate	Aluminum

Available with live-loading, double packing, and leak-off.

Also see page 17 for bellows seal valves for emission-free service.


For other materials, trims, and engineering data, see pages 23–35.

### BOLTED BONNET GLOBE DIMENSIONS AND WEIGHTS

Size NPS DN	A		B		C		D		H		K	L	Weight		Flanged Face-to-face						
	Port		End-to-end		Center-to-top, closed		Center-to-top, open		Handwheel		Socket weld bore	Socket weld depth	lb	kg	800	1500	150	300	600	1500	
	800	1500	800	1500	800	1500	800	1500	800	1500											
1/4 <sup>(1)</sup> 8	0.36	0.50	3.13	4.00	4.6	7.8	4.9	8.4	3.00	6	0.555	0.38	3.50	12.00	4.00 <sup>(2)</sup>	6.00 <sup>(2)</sup>	6.50 <sup>(2)</sup>	8.50			
9.2	13	20	102	117	198	213	76	152	14.1	9.5	1.6	5.4	102	152	165	216					
3/8 <sup>(1)</sup> 10	0.36	0.50	3.13	4.00	4.6	7.8	4.9	8.4	3.00	6	0.690	0.38	3.50	12.00	4.00 <sup>(2)</sup>	6.00 <sup>(2)</sup>	6.50 <sup>(2)</sup>	8.50			
9.2	13	20	102	117	198	213	76	152	17.5	9.5	1.6	5.4	102	152	165	216					
1/2 <sup>(1)</sup> 15	0.36	0.50	3.13	4.00	4.6	7.8	4.9	8.4	3.00	6	0.855	0.38	3.50	12.00	4.25 <sup>(2)</sup>	6.00 <sup>(2)</sup>	6.50 <sup>(2)</sup>	8.50			
9.2	13	20	102	117	198	213	76	152	21.7	9.5	1.6	5.4	108	152	165	216					
5/8 <sup>(1)</sup> 20	0.50	0.50	3.25	5.00	6.61	7.8	7.1	8.4	4.0	6	1.065	0.50	5.90	14.00	4.62	7.00	7.50	9.00			
13	13	23	127	168	198	180	213	102	152	27.1	12.7	2.7	6.4	117	178	190	229				
1 <sup>(1)</sup> 25	0.75	0.75	3.50	6.00	6.70	9.2	10.0	4.0	8	1.330	0.50	6.70	29.00	5.00	8.00	8.50	10.00				
19	19	25	152	170	233	185	254	102	203	33.8	12.7	3.0	13.2	127	203	216	254				
1 1/4 <sup>(1)</sup> 32	1.25	1.25	5.00	7.00	8.11	10.1	8.7	11.0	6.0	8	1.675	0.50	18.00	37.00	5.50	8.50	9.00	11.00			
32	32	32	127	178	206	257	221	279	152	203	42.5	12.7	8.2	16.8	140	216	229	279			
1 1/2 <sup>(1)</sup> 40	1.25	1.25	5.00	7.00	8.11	10.1	8.7	11.0	6.0	8	1.915	0.50	16.00	37.00	6.50	9.00	9.50	12.00			
32	32	32	127	178	206	257	221	279	152	203	48.6	12.7	7.3	16.8	165	229	241	305			
2 <sup>(1)</sup> 50	1.50	1.50	8.00	9.00	10.39	11.0	11.2	12.3	8.0	12	2.406	0.63	30.00	64.00	8.00	10.50	11.50	14.50			
38	38	203	229	264	279	285	312	203	305	61.1	15.9	13.6	29.0	203	266	292	368				

### WELDED BONNET GLOBE DIMENSIONS & WEIGHTS

Size NPS DN	A		B		C		D		H		K	L	Weight		Flanged Face-to-face					
	Port		End-to-end		Center-to-top, closed		Center-to-top, open		Handwheel		Socket weld bore	Socket weld depth	lb	kg	800	1500	150	300	600	1500
	800	1500	800	1500	800	1500	800	1500	800	1500										
1/4 <sup>(1)</sup> 8	0.36	0.50	2.88	3.50	4.57	6.8	4.84	7.3	3.0	6.0	0.555	0.38	2.50	7.50						
9.2	13	23	73	89	116	173	123	185	76	152	14.1	9.5	1.14	3.4						
3/8 <sup>(1)</sup> 10	0.36	0.50	2.88	3.50	4.57	6.8	4.84	7.3	3.0	6.0	0.690	0.38	2.50	7.50						
9.2	13	23	73	89	116	173	123	185	76	152	17.5	9.5	1.14	3.4						
1/2 <sup>(1)</sup> 15	0.36	0.50	2.88	3.50	4.57	6.8	4.84	7.3	3.0	6.0	0.855	0.38	2.50	7.50						
9.2	13	23	73	89	116	173	123	185	76	152	21.7	9.5	1.14	3.4						
5/8 <sup>(1)</sup> 20	0.50	0.50	3.25	3.50	6.60	6.8	6.90	7.3	4.0	6.0	1.065	0.50	4.80	7.50						
13	13	23	83	89	168	173	175	185	102	152	27.1	12.7	2.2	3.4						
1 <sup>(1)</sup> 25	0.75	0.75	3.50	5.00	6.70	8.3	7.20	9.0	4.0	6.0	1.330	0.50	5.70	15.00						
19	19	25	89	127	170	211	183	229	102	152	33.8	12.7	2.6	6.9						
1 1/4 <sup>(1)</sup> 32	1.25	1.25	5.00	5.25	8.05	10.0	8.93	10.76	6.0	8.0	1.675	0.50	12.00	23.00						
32	32	32	127	133	204	254	227	273	152	203	42.5	12.7	5.4	10.4						
1 1/2 <sup>(1)</sup> 40	1.25	1.25	5.00	5.25	8.05	10.0	8.93	10.76	6.0	8.0	1.915	0.50	12.00	23.00						
32	32	32	127	133	204	254	227	273	152	203	48.6	12.7	5.4	10.4						
2 <sup>(1)</sup> 50	1.44	1.50	5.25	10.00	9.30	12.8	10.00	14.00	6.0	12.0	2.406	0.63	17.00	57.00						
37	38	133	254	236	325	254	356	152	305	61.1	15.9	7.7	26							

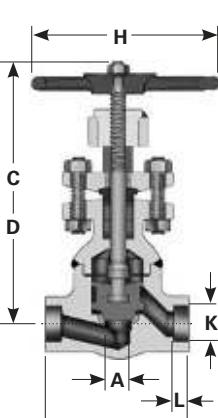


- (1) Only for A105 (carbon) and A182 (stainless F316/F316L) body material in socket weld ends and 800 pressure class.
- All other materials in 800 pressure class, refer to the NPS 1/4 (DN 20) design.
- (2) Only for A105 (carbon) and A182 (stainless F316/F316L) body material in RF end connections, bolted bonnet design and pressure classes 150, 300, and 600.
- All other materials in pressure classes 150, 300, and 600, refer to the NPS 1/4 (DN 20) design.
- (3) Only for A105 (carbon) body material in socket weld, threaded, butt weld or combination weld ends and 800 pressure class.
- All other materials in 800 pressure class, refer to the NPS 1/4 (DN 20) design.

# VELAN FORGED STEEL Y-PATTERN GLOBE VALVES

## BONNETLESS, CONVENTIONAL PORT OPENING, THREADED, SOCKET WELD OR BUTT WELD

NPS ½–4 (DN 15–100), ASME CLASSES 1690, 2680, 4500

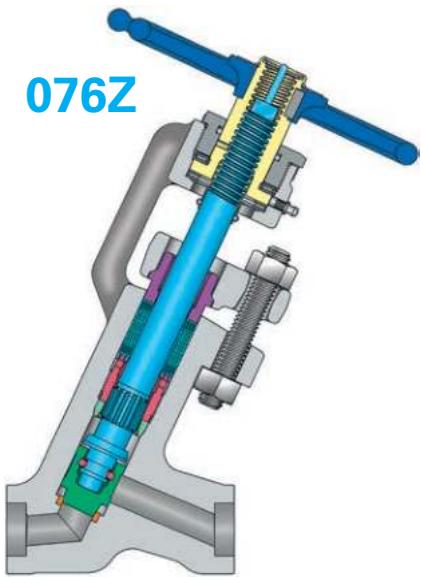

### NON-ROTATING STEM

Patented for quick serviceability,  
(USA patent number 4356832).

### DESIGN FEATURES

- Complies to ASME B16.34 standards.
- Designed for quick and easy maintenance – one step removal of all working parts including packing.
- All pressure containing parts within one body-bonnet forging – no joints to leak or welds to cut for servicing.
- Non rotating stem allows a non-spinning disc, ensures low torque and prevents torsional damage of the packing.
- Fully enclosed, lubricated stem drive system with needle bearings ensures low operating torque.
- Solid CoCr alloy disc, seat ring and backseat provide excellent long service life even in severe services.
- Backseat bevel on the stem, not on the disc, satisfies both API-600 and API-602 specifications.

PART	STANDARD MATERIALS
Body	A105
Seat (integral)	CoCr alloy
Disc	CoCr alloy
Stem	Gr. 410 (stainless)
Stem nut	A 439 Austenitic ductile iron Gr. D-2C
Backseat	CoCr alloy
Splined bushing	Gr. 630 (stainless)
Packing washer	Gr. 304 (stainless)
Packing	Graphite
Split gland bushing	Gr. CA15 (stainless)
Packing flange	A 105
Gland stud	Gr. B7
Gland nut	Gr. 2H
Yoke bushing	Gr. 1020 steel
Thrust bearing	Steel
Stem protector	Steel
O-ring	Nitrile rubber
Handwheel	Malleable iron
Snap ring	Steel
Name plate	Gr. 304 (stainless)

For more information consult Velan's  
Y-pattern globe valve catalog (CAT-BG) at [www.velan.com](http://www.velan.com)

For other materials, trims, and  
engineering data, see pages 23–35.

### DIMENSIONS, WEIGHTS AND CV

Size NPS DN	A Port		B End-to-end		C Center- to- top		H Handwheel		BP Clearance open		Weight lb/kg		Cv Flow coefficient	
	1690 2680	4500	1690 2680	4500	1690 2680	4500	1690 2680	4500	1690 2680	4500	1690 2680	4500	1690 2680	4500
¼	0.559	0.375	4.88	5.75	9.63	11.75	6.00	6.00	3.63	3.25	15	27	1.3	1.0
8	14.2	9.5	124	146	146	298	152	152	92	83	7	12.2		
¾	0.559	0.375	4.88	5.75	9.63	11.75	6.00	6.00	3.63	3.25	15	27	2.4	1.3
10	14.2	9.5	124	146	245	298	152	152	92	83	7	12.2		
½	0.559	0.375	4.88	5.75	9.63	11.75	6.00	6.00	3.63	3.25	15	27	2.9	1.5
15	14.2	9.5	124	146	245	298	152	152	92	83	7	12.2		
¾	0.559	0.559	4.88	7.00	9.63	14.78	6.00	10.00	3.63	6.00	15	56	5.0	3.0
20	14.2	14.2	124	178	245	375	152	254	92	152	7	25		
1	0.833	0.559	5.75	7.00	13.19	14.78	8.00	10.00	5.13	6.00	33	56	9.8	6.0
25	21.2	14.2	146	178	335	375	203	254	130	152	15	25		
1¼	1.125	0.833	7.25	10.13	16.63	18.88	12.00	12.00	7.57	7.00	67	94	20	9.8
32	28.6	21.2	184	257	422	480	305	305	192	178	30	43		
1½	1.125	1.125	7.25	12.00	16.63	20.75	12.00	18.00	7.57	8.00	67	148		
40	26.6	28.6	184	305	422	527	305	457	192	203	30	67	20	25
2½(3)¹	1.688	1.125	10.13	12.00	19.73	20.75	12.00	18.00	7.50	8.00	110	148		
50	42.9	28.6	257	305	501	527	305	457	190	203	50	67	60	26
2½(3)²(4)	1.688	1.50	12.00	12.00	20.69	20.75	16.00 <sup>(5)</sup>	16.00 <sup>(5)</sup>	7.25	7.25	148 <sup>(6)</sup>	148	60	47
65	42.9	38.1	305	526	527	406	406	184	184	67	67			
3²(4)³(4)	1.688	1.50	12.00	12.00	20.69	20.75	16.00 <sup>(5)</sup>	16.00 <sup>(5)</sup>	7.25	7.25	148 <sup>(6)</sup>	148	60	47
80	42.9	38.1	305	526	527	406	406	184	184	67	67			
4⁴(4)	1.688	1.50	12.00	12.00	20.69	20.75	16.00 <sup>(5)</sup>	16.00 <sup>(5)</sup>	7.25	7.25	148	148	60	47
100	42.9	38.1	305	305	526	527	406	406	184	184	67	67		

(1) 1-piece body valve design.

(2) Valves with butt weld end connection in Classes 1690 and 2680, refer to NPS 2 (DN 50) design.

(3) 2-piece body valve design in Class 4500, 2-piece body valve design in Classes 1690 and 2680 with socket weld and threaded end connection.


(4) 2-piece body valve design.

(5) Impactor handle.

(6) For 1-piece design, with butt weld end connection in Classes 1690 and 2680, weight 110 lbs (50 kg).

### FIGURE NUMBERS

THREADED, SOCKET WELD OR BUTT WELD CONNECTIONS			
CLASS	STOP VALVE	STOP CHECK VALVE	NEEDLE VALVE
1690	8076Z	8086Z	8096Z
2680	9076Z	9086Z	9096Z
4500	5076Z	5086Z	5096Z

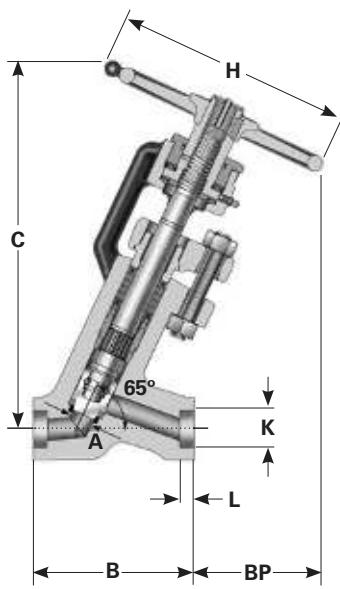


# VELAN FORGED STEEL 45° INCLINED GLOBE VALVES

## CONVENTIONAL PORT OPENING, THREADED, SOCKET WELD OR BUTT WELD

NPS ½–2 (DN 15–50), ASME CLASSES 800, 1690, 2680

COMPLIES TO ASME B16.34 STANDARDS

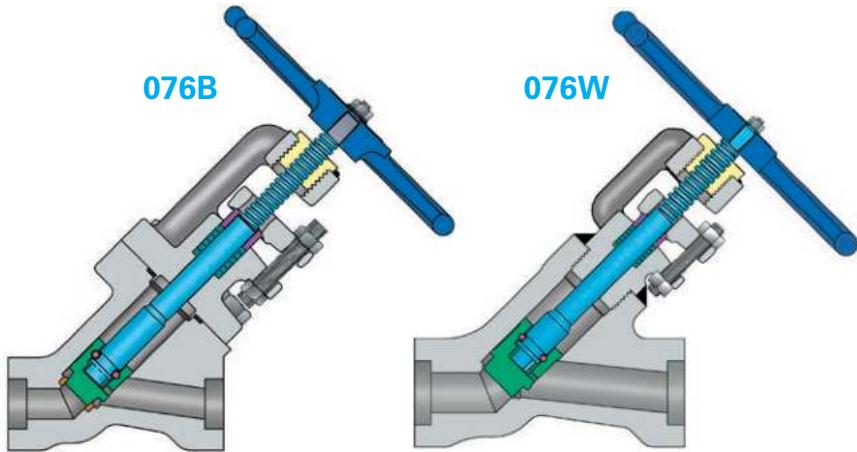

45° BOLTED BONNET


45° WELDED BONNET

PART	STANDARD MATERIALS
Body	A105
Bonnet	A105
Seat (integral)	CoCr alloy
Disc	CoCr alloy
Stem	Gr. 410 (stainless)
Stem nut	CS CD plated
Gland bushing	Gr. 416 (stainless)
Yoke bushing	AL Brz C64200
Cap Screw	Gr. B7
Gasket	Gr. 304 & Graphite
Packing	Graphite
Packing flange	CS
Gland stud	Gr. B6
Gland nut	Gr. 2H
Handwheel	Malleable iron
Name plate	Aluminum

For other materials, trims, and engineering data, see pages 23–35.


## BOLTED BONNET GLOBE 45° INCLINED VALVE DIMENSIONS, WEIGHTS & CV

Size NPS DN	A Port	B End-to-end		C Center-to-top, closed		D Center-to-top, open		H Handwheel	K Socket weld bore	L Socket weld depth	BP Clearance, open		Weight lb kg		Cv Flow coefficient	
		800 & 1690	800	1690	800	1690	800				800	1690	800	1690		
½ 15	0.559 14.2	4.00 102	4.88 124	6.76 1.72	8.81 224	7.20 183	9.25 235	4.00 102	6.00 152	0.855 21.7	0.38 9.5	4.22 107	5.50 140	14.00 6	15.00 7	3.4
¾ 20	0.559 14.2	4.00 102	4.88 124	6.76 1.72	8.81 224	7.20 183	9.25 235	4.00 102	6.00 152	1.065 27.1	0.50 12.7	4.22 107	5.5 140	14.00 6	15.00 7	5.8
1 25	0.833 21.2	4.88 124	5.75 146	7.16 182	10.6 269	7.78 198	11.22 285	4.00 102	8.00 203	1.330 33.8	0.50 12.7	4.17 106	6.75 172	15.00 7	22.00 10	15
1¼ 32	1.125 28.6	5.75 146	7.75 197	9.05 230	11.72 298	9.85 318	12.51 318	6.00 152	8.00 203	1.675 42.5	0.50 12.7	5.40 137	6.73 171	33.00 15	36.00 16	26.5
1½ 40	1.125 28.6	5.75 146	7.75 197	9.05 230	11.72 298	9.85 318	12.51 318	6.00 152	8.00 203	1.915 48.6	0.50 12.7	5.40 137	6.73 171	33.00 15	36.00 16	27
2 50	1.50 38.1	7.25 184	10.13 275	11.72 298	14.32 364	12.78 325	15.38 391	8.00 203	12.00 305	2.406 61.1	0.63 15.9	7.00 172	7.58 193	67.00 30	72.00 37	50

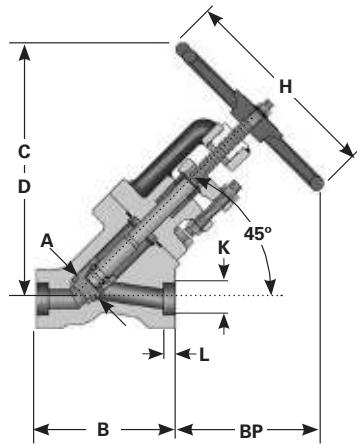

## WELDED BONNET GLOBE 45° INCLINED VALVE DIMENSIONS, WEIGHTS & CV

Size NPS DN	A Port	B End-to-end	C Center-to-top, closed		D Center-to-top, open		H Handwheel	K Socket weld bore	L Socket weld depth	BP Clearance, open		Weight lb kg		Cv Flow coefficient
			1690 & 2680	1690 & 2680	1690 & 2680	1690 & 2680				1690 & 2680	1690 & 2680	1690 & 2680	1690 & 2680	
½ 15	0.559 14.2	4.88 124	7.75 197	8.19 208	6.00 152	0.855 21.7	0.38 9.5	4.00 102	5.50 140	9.50 4	4.00 102	9.50 4	4.00 102	3.4
¾ 20	0.559 14.2	4.88 124	7.75 197	8.19 208	6.00 152	1.065 27.1	0.50 12.7	4.00 102	5.5 140	9.50 4	4.00 102	9.50 4	4.00 102	5.8
1 25	0.833 21.2	5.75 146	9.73 247	10.38 264	8.00 203	1.330 33.8	0.50 12.7	5.19 132	6.38 132	18.00 8	5.19 132	18.00 8	5.19 132	15
1¼ 32	1.125 28.6	7.75 197	11.37 28	12.22 310	8.00 203	1.675 42.5	0.50 12.7	6.38 162	6.38 162	40.00 18	6.38 162	40.00 18	6.38 162	26.5
1½ 40	1.125 28.6	7.75 197	11.37 28	12.22 310	8.00 203	1.915 48.6	0.50 12.7	6.38 162	6.38 162	40.00 18	6.38 162	40.00 18	6.38 162	27
2 50	1.50 38.1	10.13 275	14.19 360	15.26 388	12.00 305	2.406 61.1	0.63 15.9	7.45 189	7.45 189	55.00 25	55.00 25	55.00 25	55.00 25	50

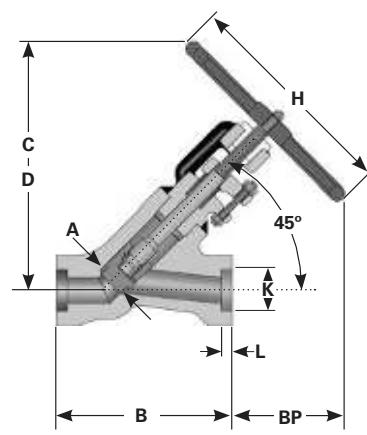


# VELAN FORGED STEEL CHECK VALVES

## CONVENTIONAL PORT OPENING, PISTON, BALL OR SWING


NPS 1/4–2 (DN 8–50), ASME CLASSES 800 (1975 psi @ 100°F), 1500 (3705 psi @ 100°F)

THREADED OR SOCKET WELD FLANGED ASME CLASSES 150, 300, 600, 1500


COMPLIES TO API 602 AND ASME B16.34 STANDARDS




PISTON BOLTED COVER



BALL TYPE BOLTED COVER



COVERLESS SWING CHECK



SWING CHECK BOLTED COVER

### SPECIFICATIONS

Type	Bolted cover	Coverless
Piston check	034B	—
Ball check	024B	—
Swing check	114B	114W

For other materials, trims, and engineering data, see pages 23–35.

### BOLTED COVER PISTON, BALL, AND SWING CHECK DIMENSIONS AND WEIGHTS

Size NPS DN	A Port				B End-to-end				C Center-to-top, bolts				K Socket weld	L Socket weld	Weight lb/kg				Flanged Face-to-face					
	Piston & ball		Swing check		Piston & ball		Swing check		Piston & ball		Swing check				Piston and ball		Swing check <sup>(2)</sup>		Piston, ball & swing check					
	800	1500	800	1500	800	1500	800	1500	800	1500	800	1500			800	1500	800	1500	150 <sup>(3)</sup>	300	600	1500		
1/4 <sup>(1)</sup> 8	0.36 9.2	0.50 12.7	— —	— —	3.13 80	4.00 102	— —	— —	1.90 48	2.70 68	— —	— —	0.555 14.1	0.38 9.5	2.5 1.2	6.6 3.0	— —	4.00 102	— —	— —	— —			
3/8 <sup>(1)</sup> 10	0.36 9.2	0.50 12.7	— —	— —	3.13 80	4.00 102	— —	— —	1.90 48	2.70 68	— —	— —	0.690 17.5	0.38 9.5	2.5 1.2	6.6 3.0	— —	4.00 102	— —	— —	— —			
1/2 <sup>(1)</sup> 15	0.36 9.2	0.50 12.7	0.50 12.7	0.50 80	3.13 80	4.00 102	3.50 89	6.00 152	1.90 48	2.70 68	2.50 64	3.70 94	0.855 21.7	0.38 9.5	2.5 1.2	6.6 3.0	5.0 7.7	4.25 108	6.00 152	6.50 165	8.50 216			
5/8 <sup>(1)</sup> 20	0.50 12.7	0.50 12.7	0.50 12.7	0.50 83	3.25 83	5.00 127	3.50 89	6.00 152	2.30 58	2.90 74	2.50 64	3.70 94	1.065 27.1	0.50 12.7	3.9 1.8	6.6 3.0	5.0 7.7	4.62 117	7.00 178	7.50 191	9.00 229			
1 25	0.75 19.1	0.75 19.1	0.75 19.1	0.75 89	3.50 152	6.00 127	5.00 152	6.00 66	2.60 97	3.8 89	3.50 94	3.70 33.8	1.330 33.8	0.50 12.7	4.8 2.2	17 8	12 5.4	17 7.7	5.00 127	8.00 203	8.50 216	10.00 254		
1 1/4 32	1.25 31.8	1.25 31.8	1.25 31.8	1.25 127	5.00 178	7.00 133	5.25 178	7.00 94	3.70 114	4.5 86	3.40 94	3.70 42.5	1.675 42.5	0.50 12.7	12 5.4	26 12	15 7	21 10	5.50 140	8.50 216	9.00 229	11.00 279		
1 1/2 40	1.25 31.8	1.25 31.8	1.25 31.8	1.25 127	5.00 178	7.00 133	5.25 178	7.00 94	3.70 114	4.5 86	3.40 86	4.20 107	1.915 48.6	0.50 12.7	12 5.4	26 7	15 10	21 165	6.50 229	9.00 241	9.50 305			
2 50	1.50 38.1	1.50 38.1	1.50 38.1	1.50 203	8.00 229	9.00 152	6.00 229	9.00 122	4.80 137	5.40 109	4.30 132	5.20 61.1	2.406 61.1	0.63 15.9	22 10.0	41 19	21 10	40 18	8.00 203	10.50 267	11.50 292	14.50 368		

### COVERLESS SWING CHECK DIMENSIONS AND WEIGHTS (CLASS 800)


Size NPS/DN	A Port	B End-to-end	C Center-to-top, body	K Socket weld bore	L Socket weld	Weight lb/kg
1/4 <sup>(1)</sup> 8	0.50 13	3.25 83	1.65 42	0.555 14.1	0.38 9.5	3.5 1.6
3/8 <sup>(1)</sup> 10	0.50 13	3.25 83	1.65 42	0.690 17.5	0.38 9.5	3.5 1.6
1/2 <sup>(1)</sup> 15	0.50 13	3.25 83	1.65 42	0.855 21.7	0.38 9.5	3.5 1.6
5/8 <sup>(1)</sup> 20	0.50 13	3.25 83	1.65 42	1.065 27.1	0.50 12.7	3.5 1.6
1 25	0.75 19	3.50 89	1.70 43	1.330 33.8	0.50 12.7	3.0 1.4
1 1/4 32	1.25 32	5.00 127	2.56 65	1.675 42.5	0.50 12.7	11.0 5.0
1 1/2 40	1.25 32	5.00 127	2.56 65	1.915 48.6	0.50 12.7	11.0 5.0
2 50	1.50 38	5.25 133	2.56 65	2.406 61.1	0.63 15.9	11.0 5.0

(1) Only for A105 (carbon) and A182 (stainless F316/F316L) body material in socket weld, threaded, butt weld or combination weld ends and 800 pressure class.

All other materials in 800 pressure class, refer to the NPS 3/4 (DN 20) design.

(2) Welded cover also available.


(3) Standard face-to-face for welded flange only.



# VELAN FORGED STEEL INCLINED PISTON CHECK VALVES

## FOR HORIZONTAL AND VERTICAL LINES

NPS ¼–4 (DN 8–100), THREADED, SOCKET WELD OR BUTT WELD  
ASME CLASSES 1690, 2680, 4500

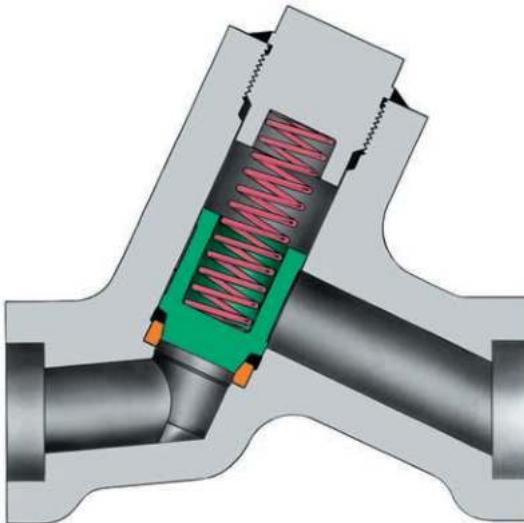

PART	STANDARD MATERIALS			
Body	A105	A182 Gr. F22	A182 Gr. F316	A 182 Gr. F91
Cover	A105	A182 Gr. F22	A182 Gr. F316	A 182 Gr. F91
Disc	CoCr alloy			
Seat, integral	CoCr alloy			
Spring <sup>(1)</sup>	Gr. 302 (stainless)	Inconel X750	Gr. 302 (stainless)	Inconel X750

## DESIGN FEATURES

- Complies to ASME B16.34 standards.
- Solid CoCr alloy disc, fully guided for fast and full seating, even without spring.
- High Cv.
- Self-draining waterways.

For other materials, trims, and engineering data, see pages 23–35.

CLASS	1690	2680	4500
Figure number	8036W	9036W	5036W

## DIMENSIONS, WEIGHTS AND CV

Size NPS DN	Port opening		End-to-end		Center-to-top		Socket weld bore	Socket weld depth	Approximate weight lb/kg		Cv Flow coefficient	
	1690 & 2680	4500	1690 & 2680	4500	1690 & 2680	4500			1690 & 2680	4500	1690 & 2680	4500
1/4 8	0.559 14.2	— —	4.88 124	— 92	3.61 —	— —	0.555 14.1	0.38 9.5	6.5 3.0	— —	1.0 —	— —
5/8 10	0.559 14.2	0.375 9.5	4.88 124	5.75 146	3.61 92	4.26 108	0.690 17.5	0.38 9.5	6.3 2.9	5 2.3	1.8 2.3	1.5
1/2 15	0.559 14.2	0.559 14.2	4.88 124	7.00 178	3.61 92	5.5 140	0.855 21.7	0.38 9.5	6.1 3	25 11	2.1 2.1	2.1
3/4 20	0.559 14.2	0.559 14.2	4.88 124	7.00 178	3.61 92	5.5 140	1.065 27.1	0.50 12.7	5.7 2.6	25 11	4.3 4.3	4.3
1 25	0.833 21.2	0.559 14.2	5.75 146	7.00 178	4.88 124	5.5 140	1.330 33.8	0.50 12.7	10.5 4.8	25 11	8.4 8.4	4.3
1 1/4 32	1.125 28.6	— —	7.25 184	— 150	5.88 —	— —	1.675 42.5	0.50 12.7	18.5 8.4	— —	17 —	— —
1 1/2 40	1.125 28.6	1.125 28.6	7.25 184	10.13 257	5.88 150	6.88 175	1.915 48.6	0.50 12.7	18.5 8.4	42 19	19 18	18
2 50	1.688 42.9	1.50 38.1	10.13 257	12.00 305	7.19 183	8.44 214	2.406 61.1	0.63 15.9	37 16.8	87 40	45 40	36
2 1/2 65	1.688 42.9	1.50 38.1	12.00 305	12.00 205	8.06 214	8.44 73.8	2.906 15.9	0.63 15.9	94 43	87 40	45 40	36
3 80	1.688 42.9	1.50 38.1	12.00 305	12.00 205	8.06 214	8.44 (2)	(2) 8.44	0.63 0.63	94 43	110 <sup>(3)</sup> 50	45 45	36
4 100	1.688 42.9	1.50 38.1	12.00 305	12.00 305	8.06 205	8.44 214	(2) 8.44	(2) 0.63	94 43	110 <sup>(3)</sup> 50	45 45	36


(1) For Classes 1690 and 2680, dimensions are as shown, or same as for NPS 2 (DN 50) valve, depending on end connection.

(2) Butt weld or flanged connection only in these sizes.


(3) For butt weld weight is 87 lbs. (40 kg).

# VELAN SPECIAL SERVICES

## VALVES FOR NUCLEAR POWER PLANTS

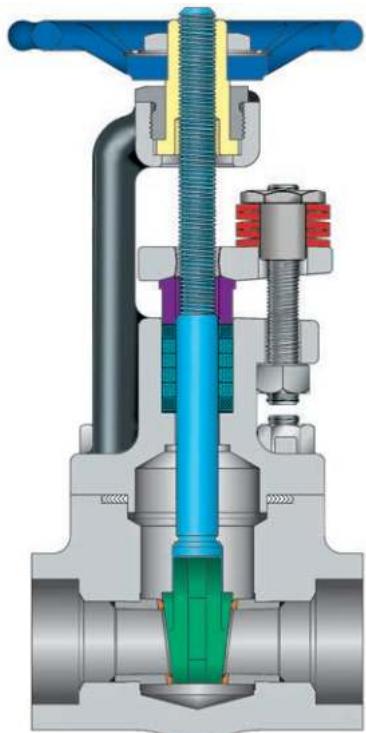


GATE VALVE

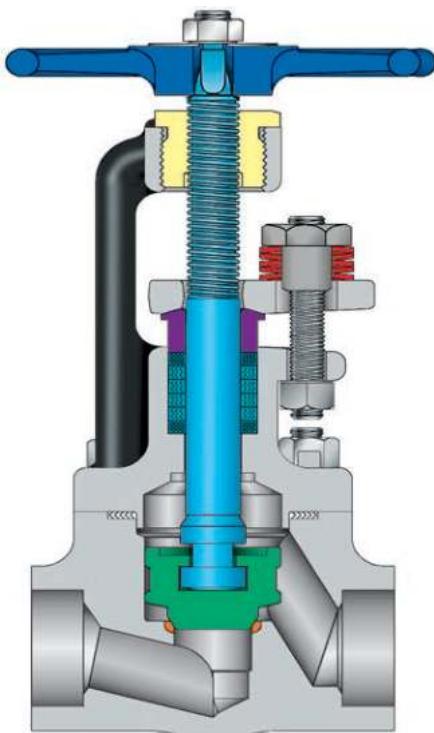

GLOBE VALVE

### FORGED CARBON, ALLOY AND STAINLESS STEEL GATE GLOBE, AND CHECK VALVES FOR NUCLEAR POWER

NPS 1/4–2 (DN 8–50) ASME CLASSES 150–1500

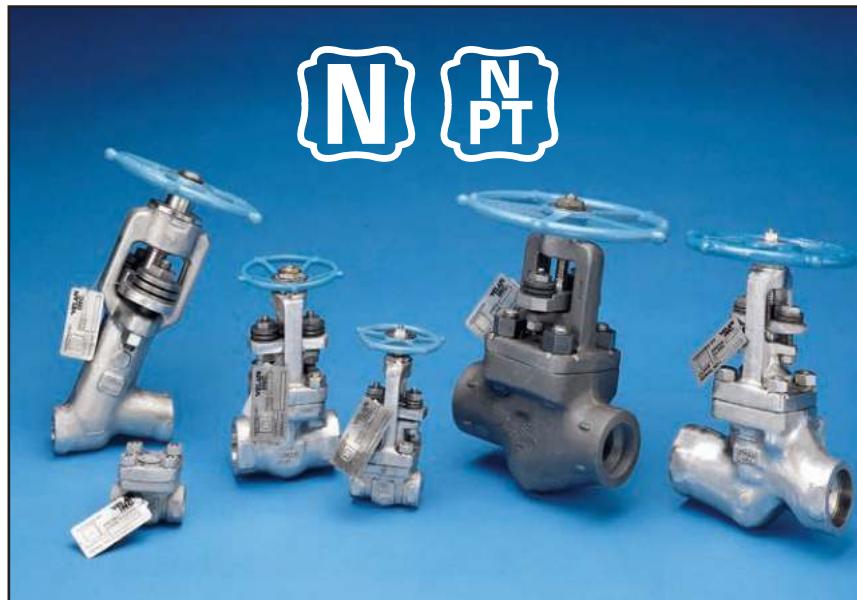

#### DESIGN FEATURES

- Complies to ASME B16.34 standards.
- Sturdy bonnet arms.
- Suitable for electric actuation.
- More repacking space.

#### Gate valves

- Seal welded seats.
- CoCr alloy or cobalt free wedge and seats.


#### Globe valves

- CoCr alloy or cobalt free seats and discs.
- Stop, stop-check, needle, flow control
- Y-Pattern models for ASME Classes 1500 and 2500

#### OPTIONS

- Double packing with leak-off.
- Live-loading for nuclear and other critical services.
- Packing blowout fitting.


#### Live-loading option



for gate and globe valves

# VELAN SPECIAL SERVICES


## BELLOWS SEAL COMPACT FORGED STEEL ZERO LEAKAGE VALVES

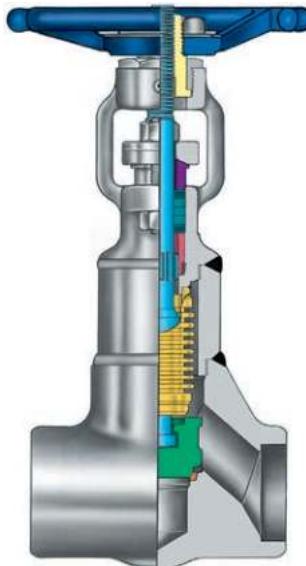

GLOBE VALVE



GATE VALVE

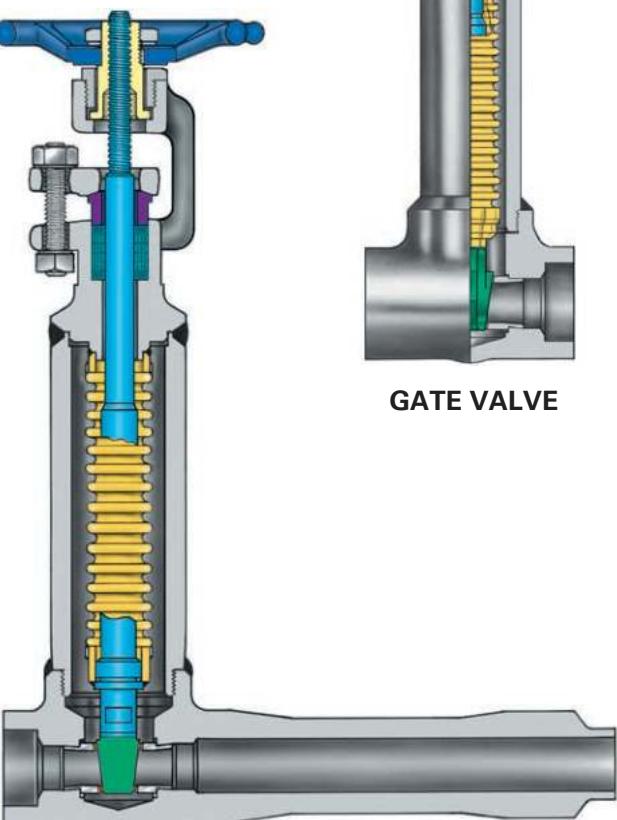

DRAIN VALVE

### FOR HIGH PRESSURE, NUCLEAR, AND OTHER CRITICAL SERVICE

**GATE VALVES:** API 602, CLASSES 800 – 1500,  
**FLANGED:** ASME CLASSES 150 – 1500

**GLOBE VALVES:** ASME CLASSES 150 – 600

**EXTENDED BODY (DRAIN) VALVES:** API 602,  
CLASSES: 800 – 1500

A valve with a bellows to seal off the stem enclosure is an ideal choice whenever leakage to the atmosphere is intolerable due to toxicity, chemical corrosion, radioactivity, other health or ecological reasons. In addition, seal welding the body-bonnet seal makes the valve hermetically sealed. The bellows is welded to the stem and to the bottom of the bonnet. Velan has been a leader in bellows seal valves since pioneering the technology in the 1950s.

### DESIGN FEATURES

- Complies to API 602 and ASME B16.34 standards.
- **No torsion of bellows.**  
Proper stem guiding of the non-rotating stem prevents torsion of bellows and ensures long cycle life on all valves.
- **Long cycle life bellows.** Designed for and successfully tested in high pressure/temperature applications.
- **The lift** is 50% in extension and 50% in compression.
- **Bellows available in SS 321, Inconel or Hastelloy.**
- **Two secondary stem seals:** a) backseat (stem bevel) protects from line pressure when open and b) stem packing.

### CYCLE LIFE

- Axial movement of the bellows is limited to a maximum of 20 to 25% of the free length, depending on pressure-temperature and desired life cycle.



Velan bellows seal valves are designed to API 602 / MSS SP-117 / ISO 15761 for:

- 5,000 cycles for NPS ½–2 (DN 15–50) globe valves.
- 2,000 cycles for NPS ½–2 (DN 15–50) gate valves.

*For more information,  
see our Bellows seal valve catalog (VEL-BS)  
at [www.velan.com](http://www.velan.com)*


# VELAN SPECIAL SERVICES

## BOILER PLANT SERVICE BLOWOFF VALVES

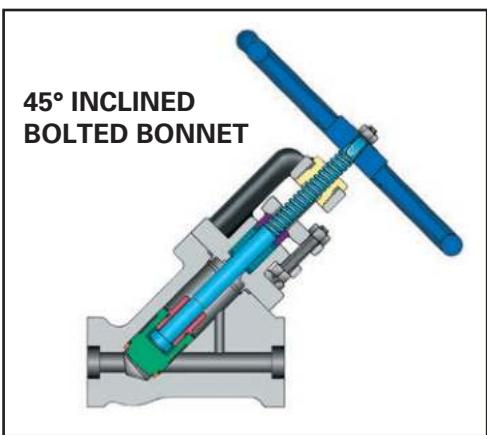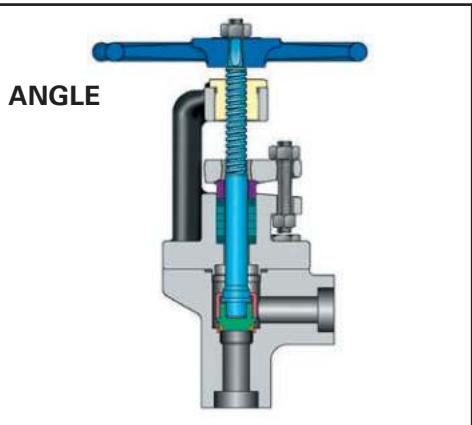

### FIGURE NUMBERS

CLASS	ANGLE	45° INCLINED
600	2215B	2216B
1500	3215B	3216B

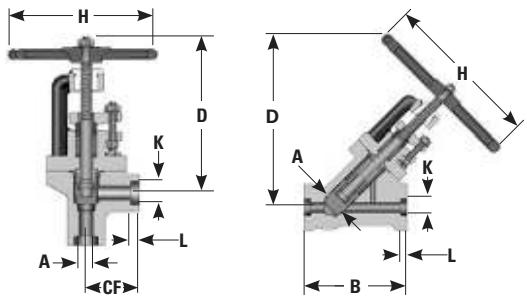

### 45° INCLINED VALVE DIMENSIONS<sup>(1)</sup>

SIZE NPS DN	A Port	B	D Center-to- top, open	H Handwheel diameter	K Socket weld bore	L Socket weld depth
		End-to-end weld end				
		600 & 1500	600 & 1500	600 & 1500	600 & 1500	600 & 1500
1 25	1.50 38.1	8.00 203	15.20 386	12.00 305	1.330 33.8	0.50 12.7
1½ 40	1.50 38.1	8.00 203	15.20 386	12.00 305	1.915 48.6	0.50 12.7
2 50	1.50 38.1	8.00 203	15.20 386	12.00 305	2.406 61.1	0.63 15.9

### NPS ½–2 (DN 15–50) FLANGED OR WELDED ENDS

#### ASME CLASSES 150–1500

Velan boiler blowoff valves meet all applicable specifications of the ASME boiler code, U.S. military standards (listed on qualified product list), U.S. Coast Guard, American Bureau of Shipping and Lloyd's.

Flanged or welded ends	Class 600*	Class 1500	Class 2500
Basic steam rating	535 psi @ 850°F	1340 psi @ 850°F	2230 psi @ 850°F
Max. boiler pressure	935 psi	2455 psi	3206 psi
Maximum non-shock	1480 psi @ 100°F	3705 psi @ 100°F	6170 psi @ 100°F

\* Use for Classes 300 and 400 boilers.

### APPLICATIONS

- Power and utility boilers
- Cogeneration systems
- Chemical recovery boilers
- Wood-fired boilers
- Solid waste fuel-firing systems
- Circulating fluidized bed (CFB) boilers
- Industrial waste recovery and incineration plants

### TYPICAL SERVICE

- |                  |                        |                 |
|------------------|------------------------|-----------------|
| ● Blowoff        | ● Water/steam shut-off | ● Chemical feed |
| ● Acid cleaning  | ● Gauge shut-off       | ● Vents         |
| ● Steam sampling | ● Main stop drains     | ● Feedwater     |

Many installations use a tandem combination of two valves. The valve closer to the boiler should be wide open first and then the second valve opened slowly. At the end of the blowoff period, a reverse procedure should be used.

### DESIGN FEATURES

These special blowoff valves are available in bolted bonnet angle and streamlined flow 45° inclined designs for Class 600 and 1500 primary service and in bonnetless angle and inclined designs for Class 2500.

- Complies to ASME B16.34 standards.
- CoCr alloy seats and fully-guided CoCr alloy discs resist the excessive corrosion and erosion effects aggravated by grid and boiler scale particles and high temperature changes.

**NOTE:** See page 12 for Y-pattern globe valves or for more information consult Velan's Y-pattern globe valve catalog (CAT-BG) at [www.velan.com](http://www.velan.com).

### ANGLE VALVE DIMENSIONS<sup>(1)</sup>

SIZE NPS DN	A	CF	D	H	K	L
	Port	Center-to-end weld end	Center-to- top, open	Handwheel diameter	Socket weld bore	Socket weld depth
	600 & 1500	600 & 1500	600 & 1500	600 & 1500	600 & 1500	600 & 1500
½ 15	0.453 11.5	2.00 51	7.88 200	6.00 152	0.855 21.7	0.38 9.5
¾ 20	0.625 15.9	2.50 64	8.13 207	6.00 152	1.065 27.1	0.50 12.7
1 25	1 25.4	3.00 76	10.25 260	8.00 203	1.330 33.8	0.50 12.7
1¼ 32	1.448 36.8	3.50 89	10.56 268	12.00 305	1.675 42.5	0.50 12.7
1½ 40	1.448 36.8	3.50 89	10.56 268	12.00 305	1.915 48.6	0.50 12.7
2 50	1.750 44.5	4.50 114	12.31 313	12.00 305	2.406 61.1	0.63 15.9

(1) Contact Velan for flanged valve dimensions and weights

# VELAN SPECIAL SERVICES

## CONTINUOUS BLOWDOWN AND BOILER PLANT SERVICE VALVES

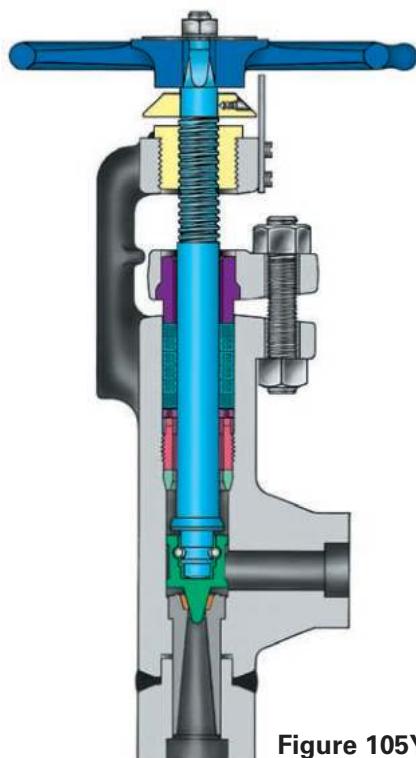


Figure 105Y


### NPS 1/2-2 (DN 15-50) FORGED ANGLE

ASME CLASSES 600, 1500, 2500  
COMPLIES TO ASME B16.34 STANDARDS

This valve is designed for continuous blowdown but can also be used for sampling and boiler feed pump bypass relief where high pressure drop causes erosion and cavitation which can destroy conventional globe valves. It incorporates a hardfaced CoCr alloy disc and seat and a venturi diffuser from stainless steel type 316. Orifice range:  $1/8$  to  $1\frac{1}{16}$ " (3.18 to 42.86 mm), depending on the capacity required.

### OTHER VELAN FORGED VALVES FOR BOILERS PLANT SERVICE

- **Gate and globe, NPS 1/4-2 (DN 8-50)**  
Bolted and welded bonnet, ASME Classes 800-1500  
—see Pressure seal and bolted bonnet catalog
- **Gate and globe, NPS 2 1/2-24 (DN 65-600)**  
Bolted or pressure seal, ASME Classes 600-4500
- **Swing, piston and tilting disc check valves,  
NPS 1/2-24 (DN 15-600)**  
Bolted or pressure seal, ASME Classes 600-4500
- **Y-Pattern bonnetless globe valves,  
NPS 1/4-4 (DN 8-100)**, ASME Classes 1690-4500
- **Y-Pattern piston check, NPS 1/4-4 (DN 8-100)**  
ASME Classes 600-4500

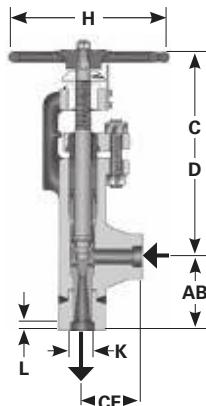


For more details about other Velan forged valves for boilers plant service see our other product catalogs on [velan.com](http://velan.com)


Size NPS DN	AB Center-to- bottom	CF Center-to- end	C Center-to- top, closed	D Center-to- top, open	H Handwheel	K	L	Weight lb kg
						Socket weld bore	Socket weld depth	
1/2 15	3.45 88	3.19 81	11.9 302	12.6 320	8.00 203	0.855 21.7	0.38 9.5	28 13
3/4 20	3.62 92	3.19 81	11.9 302	12.6 320	8.00 203	1.065 27.1	0.50 12.7	28 13
1 25	4.42 112	3.19 81	11.9 302	12.6 320	8.00 203	1.330 33.8	0.50 12.7	31 14
1 1/2 40	5.00 127	3.00 76	15.8 401	16.6 422	12.00 305	1.675 42.5	0.50 12.7	57 26
2 50	6.50 165	5.00 127	18.3 465	19.7 500	12.00 305	2.406 61.1	0.63 15.9	93 42

### WIDE OPEN CAPACITIES (%) VS HANDWHEEL TURNS (↻)


NPS 1/2-1 valve



NPS 1 1/2 valve




NPS 2 valve

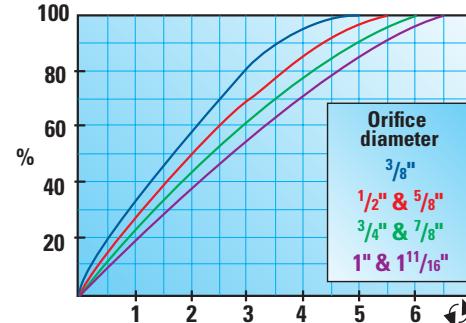


# VELAN SPECIAL SERVICES

## FORGED CRYOGENIC VALVES

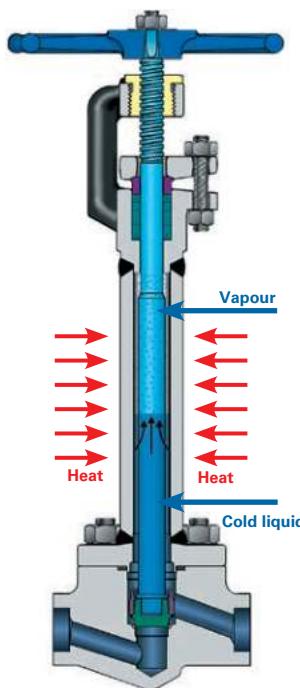

GLOBE VALVE

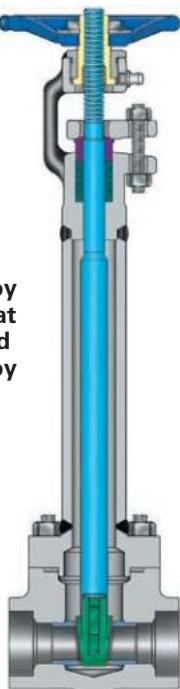

With  
CoCr alloy  
faced seat  
and solid  
CoCr alloy  
wedge

**NOTE:** For more information, see our cryogenic valves catalog (VEL-CRYO) at [www.velan.com](http://www.velan.com).

### FORGED AUSTENITIC STEEL GATE, GLOBE, AND CHECK VALVES NPS ½–2 (DN 15–50) ASME CLASSES 150–1500

The production, transport and storage of liquified gases such as Oxygen, Nitrogen, Argon, Natural Gas, Hydrogen or Helium down to -425°F (-254°C) presents several technical problems. Velan specially adapted extended bonnet forged valves offer safe and efficient service.

#### DESIGN FEATURES

- **Extended bonnets** with sufficient gas column length, usually specified by customer, are supplied for all valves to keep stem packing at sufficient distance away from the cold fluid to remain functional.
- **Solid CoCr alloy wedges** on NPS ½–2 (DN 15–50) valves operate with no galling in cryogenic service.
- **PCTFE and dualseal disc inserts (optional)** for globe and check valves check discs.
- **Cleaning:** All cryogenic valves are thoroughly degreased and cleaned and pipe ends are sealed to prevent contamination.

#### MATERIALS

- **Body and bonnet:** Austenitic stainless steel forgings used for bodies and bonnets offer excellent impact strength, minimal heat loss and protection against corrosion.
- **Stem:** To reduce galling, stems are made from advanced Nitronic 50 (grade XM-19 A479) with high tensile even at extreme low temperatures, excellent low friction and galling-free movement at points of stem contact.
- **Wetted parts:** All austenitic stainless steel and CoCr alloy.
- **Yoke bushings:** Bronze.
- **Packing:** PTFE or other plastic packing protected from freezing by a column of insulating gas.
- **Seating faces:** CoCr alloy is used to prevent seizing and galling. When extremely tight shut-off is required, globe and check valves may be supplied with PCTFE, PTFE or other soft inserts.
- **Bolting:** Strain-hardened austenitic stainless steel.
- **Lubrication of yoke bushing nut (yoke nut):**  
Exxon, Nebula EPI; Shell, Darina EPI; and Lubriplate, No. 930-AA or 930-AAA.

#### TABLE OF LIQUIFIED GASES


Type	Boiling point		Liquid density lb/ft <sup>3</sup>
	°C	°F	
Natural gas (LNG)	-168.0	-270	26.00
Methane (CH <sub>4</sub> )	-161.5	-258	26.20
Oxygen (O <sub>2</sub> )	-182.9	-296	71.20
Argon (A)	-185.9	-303	87.40
Helium (He)	-268.9	-452	7.82
Carbon Dioxide (CO <sub>2</sub> )	-78.5	-109	50.60
Air	-194.4	-318	57.87
Nitrogen (N <sub>2</sub> )	-195.8	-320	50.45
Hydrogen (H <sub>2</sub> )	-252.7	-423	4.43
<b>Absolute zero</b>	<b>-273.16</b>	<b>-460</b>	—

# VELAN SPECIAL SERVICES

## HYDROFLUORIC (HF) ACID PROCESSING VALVES



Hydrofluoric acid is one of the strongest and most corrosive acids. Industries using HF acid in their manufacturing process have placed an increasing emphasis on safety in using this product.

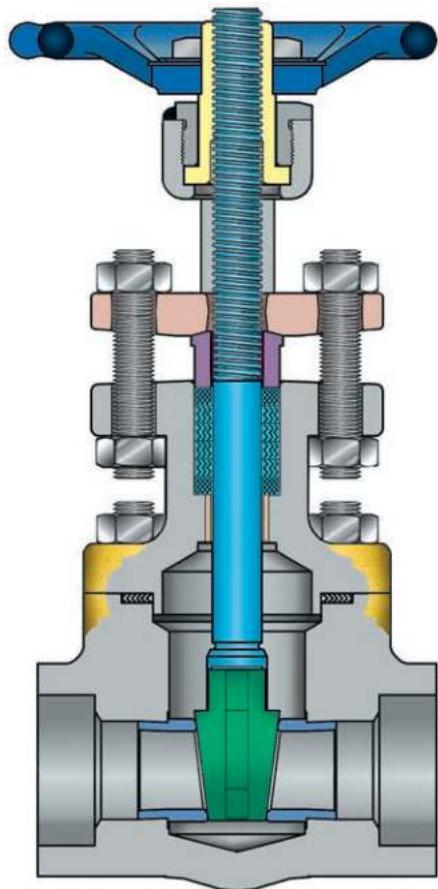

GATE VALVE

**NOTE:** For more information go to [www.velan.com](http://www.velan.com) to download a copy of Velan's HF acid gate, globe and check valves flyer (CAT-HFA).

### HF ACID GATE, GLOBE AND CHECK VALVES

NPS ½–2 (DN 15–50), ASME CLASSES 150–800


Fugitive emissions are a critical factor in the performance of any HF Acid valve and at Velan, we have been committed to reducing emissions beyond the industry standards, and providing the highest quality products to our customers for over 50 years. Velan offers a comprehensive line of Phillips and UOP approved API 602 / ASME B16.34 gate, globe and check HF acid valves with several benefits.

#### DESIGN FEATURES:


- **Stem drive:** Two-piece allows for replacement of yoke bushing in-line, removal of handwheel without affecting position of valves (closed or opened).
- **Rising stem:** Makes for easy visibility for open-close indications.
- **Gland:** Two piece gland bushing/packing flange is self-aligning to prevent stem damage for cocked gland.
- **Stem made from hardened Monel K500** for strength and durability.
- **Nickel plated in stem hole for carbon steel valves** to combat severe alkylation conditions.
- **HF acid detecting paint** to ensure valve sealing integrity.
- **Bonnet:** Large extended type bonnet grade.
- **Bonnet joint:** Encapsulated gasket design.
- **Body:** High quality Monel or A105 normalized body with API 602 wall thickness for maximum service.
- **Wedge solid Monel.**
- **Seat rings:** Made of solid Monel 400.

#### OPTIONAL DESIGN FEATURES

##### Nickel-lined stuffing box and stem hole

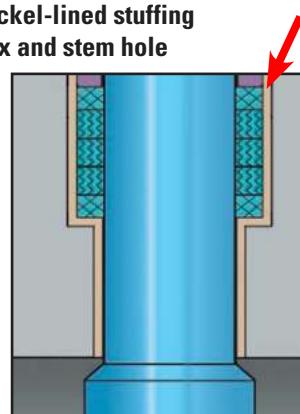

**Grease injector & lantern ring**  
Where grease injection is a requirement (UOP only).

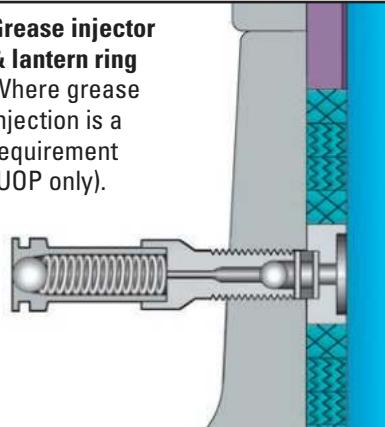

# VELAN SPECIAL SERVICES

## CUSTOM DESIGN FABRICATED VALVES

*Take advantage of increased flexibility with Velan custom-design fabricated valves*

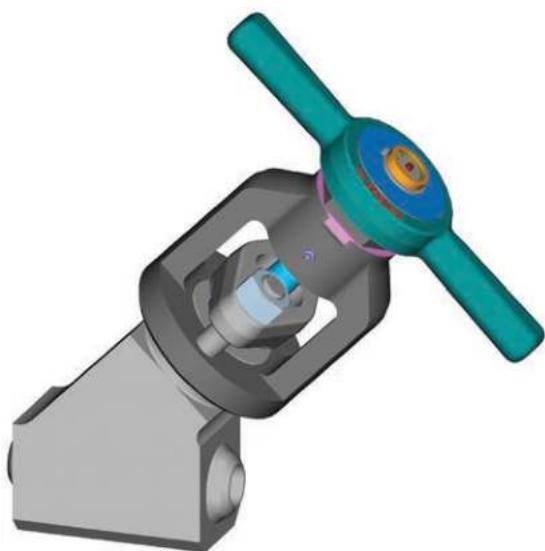


Illustration of a Velan custom design forged globe valve.

### FABRICATED GATE, GLOBE, CHECK VALVES

NPS ½–2 (DN 8–50), ASME CLASSES 150–2680

As a leading manufacturer of API 602 forged gate, globe and check valves, Velan maintains one of the largest and most comprehensive inventories available from any manufacturer. Despite tens of thousands of ready-to-ship valves located around the world, requirements inevitably come up for non-standard items, and Velan has the perfect solution: fabricated valves.

Built from forged bar stock materials, Velan fabricated gate, globe and check valves offer the advantage of short lead times for non-stock items in exotic alloys.

Velan can readily provide fabricated valves in a wide variety of designs. Furthermore, our Engineering Department has the expertise to custom-design a valve to best handle your critical requirements. Backed up by advanced software tools, including finite element analysis, computational fluid dynamics and 3D solid modeling, Velan has a long history of designing and manufacturing superior quality valves that outperform the most demanding performance requirements.

### FABRICATED DESIGN RANGE

- Gate
- Extended body gate
- Globe
- 45° inclined globe
- Critical services
- Y-pattern bonnetless globe
- Piston bolted cover check
- Ball type bolted cover check
- Coverless swing check

### MATERIALS:

- Alloy 20
- Duplex
- F51
- F314L
- F347
- F9
- F91
- F44
- Hastelloy
- Incoloy
- Inconel
- Super duplex

Many other approved materials are also available.

### CONNECTIONS:

- Butt weld
- Flanged
- NPT
- Socket weld

**NOTE:** Contact Velan Sales Dept. for more information.

# ENGINEERING DATA

## SPECIFICATION OF FORGED VALVE MATERIALS

### BODY AND BONNET, PACKING FLANGE, WEDGE-DISC-SEAT

**TABLE 1**

COMPOSITION %	DESCRIPTION		CARBON STEEL		ALLOY STEEL				STAINLESS STEEL		
	ASTM DESIGNATION	A105 <sup>(2)</sup>	A350 Gr. LF2 <sup>(2)</sup>	1 1/4 Cr 1/2 Mo	2 1/4 Cr-1 Mo	5% Cr	9% Cr	9% Cr	316	321	
				A182 Gr. F11	A182 Gr. F22 Cl.3	A182 Gr. F5	A182 Gr. F9	A182 Gr. F91	A182 Gr. F316	A182 Gr. F316L	A182 Gr. F321
Carbon	0.35 max.	0.35 max.	0.10-0.20	0.05-0.15 max.	0.15 max.	0.15 max.	0.08-0.12	0.08 max. <sup>(3)</sup>	0.035 max.	0.08 max.	
Manganese	0.60-1.05	0.60-1.35 max.	0.30-0.80	0.30-0.60	0.30-0.60	0.30-0.60	0.30-0.60	2.00 max.	2.00 max.	2.00 max.	
Phosphorus	0.035 max.	0.035 max.	0.040 max.	0.040 max.	0.030 max.	0.030 max.	0.020 max.	0.045 max.	0.045 max.	0.045 max.	
Sulphur	0.040 max.	0.040 max.	0.040 max.	0.040 max.	0.030 max.	0.030 max.	0.010 max.	0.030 max.	0.03 max.	0.03 max.	
Silicon	0.10-0.35 max.	0.15-0.30	0.50-1.00	0.50 max.	0.50 max.	0.50-1.00	0.20-0.50	1.00 max.	1.00 max.	1.00 max.	
Nickel	—	—	—	—	0.50 max.	—	0.4 max.	10.0-14.0	10.0-15.0	9.0-12.0	
Chromium	—	—	1.00-1.50	2.00-2.50	4.0-6.0	8.0-10.0	8.0-9.50	16.0-18.0	16.0-18.0	17.0 min.	
Molybdenum	—	—	0.44-0.65	0.87-1.13	0.44-0.65	0.90-1.10	0.85-1.05	2.0-3.0	2.0-3.0	(4)	
Special Tests	—	impact-50°F	—	—	—	—	—	—	—	—	
Heat Treatment	Normalized	QT or NT <sup>(5)</sup>	NT <sup>(5)</sup>	NT <sup>(5)</sup>	NT <sup>(5)</sup>	NT <sup>(5)</sup>	NT <sup>(5)</sup>	Sol. annealed	Sol. annealed	—	
Tensile psi min.	70,000	70,000	70,000	75,000	70,000	85,000	85,000	75,000	70,000	75,000	
Yield psi min.	36,000	36,000	40,000	45,000	40,000	55,000	60,000	30,000	25,000	30,000	
Elong. % Min.	22	22	20	20	20	20	20	30	30	30	
R. Area % Min.	30	30	30	30	35	40	40	50	50	50	
Hardness* HB <sup>(1)</sup>	187 max.	197 max.	143-207	156-207	143-217	179-217	248 max.	—	—	—	

(1) All forgings are softer than 237 HB = 22 HRC.

(2) A105, A 350 Gr. LF2 Standard at Velan, 0.25 C max.

(3) Material code 13: 0.030 max.

(4) Titanium: min. 5 x C, max. 6 x C.

(5) QT: Quenched and tempered

NT: Normalized and tempered

**TABLE 2**

ASTM DESIGNATION	BAR STOCK								CAST		
	CR 13		STAINLESS STEELS			MONEL		HASTELLOY	MONEL	CoCr ALLOY Grade 6	AUSTENITIC DUCTILE
	A479 410 <sup>(6)</sup>	A582 416 <sup>(6)</sup>	A479 316 ST. HARD.	A479 316	A564 630	B164 MONEL	AMS 4676D K-MONEL	B574 N 10276	A494 M-25S	AMS 5387 A	A 439 D-2C
Carbon	0.15	0.15	0.08	0.08	0.07	0.3	0.25	0.010	0.25	0.9-1.4	2.90
Manganese	1.00	1.25	2.00	2.00	1.00	2.0	1.50	1.0	1.50	1.0	1.80-2.40
Phosphorus	0.040	0.06	0.045	0.045	0.040	—	0.02	0.04	0.03	0.04	0.08
Sulphur	0.030	0.15 min.	0.030	0.030	0.030	0.024	0.010	0.03	0.03	0.04	—
Silicon	1.00	1.00	1.00	1.00	1.00	0.5	1.00	0.08	3.5-4.5	1.5	1.00-3.00
Nickel	—	—	10.00-14.00	10.00-14.00	3.00-5.00	63.0	63.00-70.00	Balance	Balance	3.0	21.00-24.00
Chromium	11.50-13.50	12.00-14.00	16.00-18.00	16.00-18.00	15.00-17.50	—	—	14.5-16.5	—	27.0-31.0	0.50
Molybdenum	—	—	2.00-3.00	2.00-3.00	—	—	—	15.0-17.0	—	1.5	—
Copper	—	—	—	—	3.00-5.00	28.0-34.0	Balance	—	27.0-33.0	—	—
Aluminum	—	—	—	—	—	—	—	—	—	—	—
Cobalt	—	—	—	—	—	—	—	—	—	Balance	—
Tungsten	—	—	—	—	—	—	—	—	—	3.5-5.5	—
Iron	—	—	—	—	—	—	—	—	3.50 Max.	3.0	—
Special Condition	Temper	Hard	Level 2	—	—	Hot worked	Hot Fin.	—	Age Hard.	—	—
Heat Treat.	Class 2	Hard Temper	Sol. annealed	Sol. annealed	H 1100	—	—	—	—	—	—
Tensile psi min.	110,000	—	95,000	75,000	140,000	80,000	140,000	100,000	—	130,000	58,000
Yield psi min.	85,000	—	75,000	30,000	115,000	40,000	100,000	41,000	—	—	28,000
Elong. % min.	15	—	25	30	14	30	20	40	—	1	20
R. Area % min.	45	—	40	40	45	—	—	—	—	—	—
Hardness HB	269 max.	293-352	—	—	302 min.	—	326 min.	—	300 min.	344 min.	121-171

(6) Cr 13 available in soft form. Less than 237 HB.

Non-Cobalt hard facing alloy available.

**Note:** CoCr alloy as used throughout this catalog refers to cobalt chrome hardfacing alloys as supplied by Kennametal Stellite™, and other approved manufacturers.

# ENGINEERING DATA

## STEM PACKING

TYPE OF PACKING	TYPE OF SERVICE	SERVICE TEMPERATURE <sup>(1)</sup>
Die-formed graphite sandwiched between braided graphite, or an all braided graphite set	Steam, air, water, oils, liquified petroleum	Up to 1150°F (621°C) Up to 1000°F (538°C) for valves in compliance with API 602 / API 624.
PTFE V-rings	All acids, alkali, solvents, gases, except fluorine	-120 to 500°F (-84 to 260°C)
Braided PTFE	Hydrogen, peroxide, oleum, acids, alkali	-100 to 400°F (-73 to 204°C)

## BODY-BONNET GASKETS

TYPE OF GASKET	TYPE OF VALVE	SERVICE TEMPERATURE <sup>(1)</sup>
Spiral wound Gr. 304 (stainless) + Graphite	Forged valves	Up to 1150°F (621°C)
Spiral wound Gr. 304 (stainless) + PTFE	Forged valves for chemical industry	Up to 500°F (260°C)
Spiral wound Monel + PTFE	Forged valves for chemical industry	Up to 500°F (260°C)

(1) Temperatures up to 1400°F (760°C) are available when specified.

## TRIM MATERIALS

TRIM (CODE)	WEDGE/DISC SEATING SURFACE	SEAT SURFACE	STEM
13% Cr (TY)	CA15	CoCr alloy	410
Full CoCr alloy (TS)	CoCr alloy	CoCr alloy	410
316 (MY)	CF8M or 316	CoCr alloy	316
316 full CoCr alloy (MS)	CoCr alloy	CoCr alloy	316
Monel (XY)	Monel	CoCr alloy	Monel
Monel (XX)	Monel	Monel	Monel
Hastelloy (HC)	Hastelloy C	CoCr alloy	Hastelloy C
(SX)	CF8M	CF8M	316

## HF (HYDROFLUORIC ACID) VALVES

PART	RECOMMENDED TRIMS FOR HF ACID SERVICE
Stem	Monel K
Wedge and disc	Monel or monel with PTFE, with additional side clearance to prevent buildup.
Seats	Monel
Gasket	Monel and PTFE
Packing	PTFE V-rings
Studs	A 193-B7M
Nuts	A 194-2HM

## CHLORINE VALVES

PART	RECOMMENDED TRIMS FOR CHLORINE SERVICE
Stem	Monel K
Wedge and disc	Monel or Monel with PTFE
Seats	Monel
Gasket	Monel and PTFE
Packing	PTFE V-rings
Bolts	A 193-B7


Note: Special cleaning procedure and packing available.

## SOUR SERVICE VALVES

Valves shown in this catalog are available with materials in compliance with **NACE MR0103** and **NACE MR0175**. The requirement for NACE compliant materials must be specified by the purchaser at time of inquiry and/or order. Please refer to the How-To-Order section at the end of this catalog for a listing of available NACE compliant trims. Please note that it is the equipment user's responsibility to select materials suitable for the intended service or to ensure that a material will be satisfactory in the intended environment.

## THROTTLING GLOBE VALVES

Regular style globe valves are suitable for moderate throttling applications. As a general rule, an adequately sized globe valve (i.e. with pipe velocity between 15 to 25 ft/sec for water and 200 to 300 ft/sec for steam) should not be throttled down below 35% of its maximum full open Cv capacity (approximately 20% of full stroke). Harsh throttling, below 35% of full Cv capacity, will require analysis by applications department to determine suitability under possible cavitation, flashing, noise and vibration.

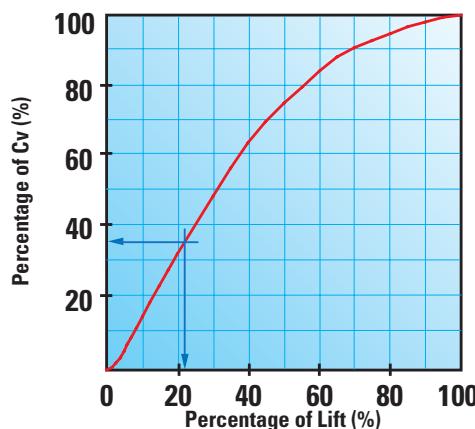

# ENGINEERING DATA

# PRESSURE TEMPERATURE RATINGS

## API 602 FORGED STEEL, CLASS 800

SERVICE TEMPERATURE		A105 <sup>(1)</sup> A350 GR. LF2 <sup>(1)</sup> A216 GR. WCB <sup>(1)</sup>		A350 GR. LF3 <sup>(2)</sup> A352 GR. LC2 <sup>(2)</sup> A352 GR. LC3 <sup>(2)</sup>		A182 Gr. F11 Cl.2 <sup>(3)</sup> A217 Gr. WC6 <sup>(4)</sup>		A182 Gr. F22 Cl.3 <sup>(3)</sup> A217 Gr. WC9 <sup>(4)</sup>		A182 Gr. F5 A182 Gr. F5a A217 Gr. C5	
°F	°C	psig	bar	psig	bar	psig	bar	psig	bar	psig	bar
-20 to 100	-29 to 38	1975	137.2	2000	138.9	2000	138.9	2000	138.9	2000	138.9
200	94	1810	125.8	2000	138.9	2000	138.9	2000	138.9	1985	137.9
300	149	1745	121.3	1940	134.8	1925	133.7	1940	134.8	1910	132.7
400	205	1690	117.5	1880	130.6	1850	128.6	1880	130.6	1880	130.6
500	260	1610	112.0	1775	123.4	1775	123.4	1775	123.4	1775	123.4
600	316	1515	105.5	1615	112.4	1615	112.4	1615	112.4	1615	112.4
650	344	1465	102.0	1570	109.3	1570	109.3	1570	109.3	1570	109.3
700	371	1415	98.6	—	—	1515	105.5	1515	105.5	1515	105.5
750	399	1350	94.1	—	—	1420	98.9	1420	98.9	1410	98.2
800	427	1100	76.9	—	—	1355	94.4	1355	94.4	1355	94.4
850	455	850	59.6	—	—	1300	90.6	1300	90.6	1290	90.0
900	482	615	43.4	—	—	1200	83.8	1200	83.8	985	68.9
950	510	365	26.2	—	—	850	59.6	1025	71.7	735	51.7
1000	538	225	16.5	—	—	575	40.7	710	50.0	530	37.6
1050	566	—	—	—	—	385	27.6	465	33.1	385	27.6
1100	594	—	—	—	—	255	18.6	295	21.4	265	19.3
1150	621	—	—	—	—	165	12.4	180	13.4	165	12.4
1200	649	—	—	—	—	100	7.9	110	8.6	95	7.6

SERVICE TEMPERATURE		A182 Gr. F9 A217 Gr. C12		A182 Gr. F316 <sup>(6)</sup> A351 Gr. CF3M <sup>(5)</sup> A351 Gr. CF8M	
°F	°C	psig	bar	psig	bar
-20 to 100	-29 to 38	2000	138.9	1920	133.4
200	94	2000	138.9	1655	115.1
300	149	1940	134.8	1495	104.1
400	205	1880	130.6	1370	95.5
500	260	1775	123.4	1275	88.9
600	316	1615	112.4	1205	84.1
650	344	1570	109.3	1180	82.4
700	371	1515	105.5	1160	81.0
750	399	1420	98.9	1140	79.6
800	427	1355	94.4	1125	78.6
850	455	1300	90.6	1115	77.9
900	482	1200	83.8	1105	77.2
950	510	1005	70.3	1030	72.0
1000	538	675	47.6	970	67.9
1050	566	460	32.7	960	67.2
1100	594	300	21.7	815	57.2
1150	621	200	14.8	630	44.5
1200	649	140	10.7	495	35.1
1250	677	—	—	390	27.9
1300	705	—	—	310	22.4
1350	732	—	—	255	18.6
1400	760	—	—	200	14.8
1450	788	—	—	155	11.7
1500	816	—	—	110	8.6

**NOTE:** All other small forged steel valves NPS 1/4–2 (DN 8–50) have pressure-temperature ratings to B16.34.

- (1) Permissible but not recommended for prolonged use above about 800°F (425°C).
- (2) Not to be used over 650°F (345°C).
- (3) Permissible but not recommended for prolonged use above about 1100°F (595°C).
- (4) Not to be used over 1100°F (595°C).
- (5) Not to be used over 850°F (455°C).
- (6) At temperatures over 1000°F (538°C) use only when the carbon content is 0.04% or higher (material code 10).

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED CARBON STEEL A105<sup>(1)</sup> – US customary

### Standard Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	450	1125	2225	3350	5575	9275	16675	2975	6275	9925
	Seat	325	825	1650	2450	4100	6800	12225	2175	4600	7300
°F	Standard Class									Intermediate Standard Class	
-20 to 100	285	740	1480	2220	3705	6170	11110	1975	4175	6615	
200	260	680	1360	2035	3395	5655	10185	1810	3825	6065	
300	230	655	1310	1965	3270	5450	9815	1745	3685	5845	
400	200	635	1265	1900	3170	5280	9505	1690	3570	5660	
500	170	605	1205	1810	3015	5025	9040	1610	3395	5385	
600	140	570	1135	1705	2840	4730	8515	1515	3200	5070	
650	125	550	1100	1650	2745	4575	8240	1465	3095	4905	
700	110	530	1060	1590	2665	4425	7960	1415	3000	4745	
750	95	505	1015	1520	2535	4230	7610	1350	2855	4535	
800	80	410	825	1235	2055	3430	6170	1100	2315	3675	
850	65	320	640	955	1595	2655	4785	850	1795	2845	
900	50	230	460	690	1150	1915	3455	615	1295	2055	
950	35	135	275	410	685	1145	2055	365	770	1225	
1000	20	85	170	255	430	715	1285	225	485	765	

### Limited Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
	Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375
°F	Limited Class									Intermediate Limited Class	
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	285	740	1480	2220	3700	6170	11110	1975	4175	6615	
400	280	735	1465	2200	3665	6105	10995	1955	4130	6545	
500	280	735	1465	2200	3665	6105	10995	1955	4130	6545	
600	280	735	1465	2200	3665	6105	10995	1955	4130	6545	
650	275	715	1430	2145	3575	5960	10730	1905	4030	6390	
700	265	690	1380	2075	3455	5760	10365	1845	3895	6175	
750	245	635	1270	1905	3170	5285	9515	1695	3570	5665	
800	195	515	1030	1545	2570	4285	7715	1375	2895	4595	
850	155	400	795	1195	1995	3320	5980	1060	2245	3560	
900	110	285	575	860	1435	2395	4305	765	1615	2565	
950	65	170	345	515	855	1430	2570	460	965	1535	
1000	40	105	215	320	535	895	1605	285	605	960	

### Special Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
	Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375
°F	Special Class									Intermediate Special Class	
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	285	740	1480	2220	3700	6170	11110	1975	4175	6615	
400	280	735	1465	2200	3665	6105	10995	1955	4130	6545	
500	280	735	1465	2200	3665	6105	10995	1955	4130	6545	
600	280	735	1465	2200	3665	6105	10995	1955	4130	6545	
650	275	715	1430	2145	3575	5960	10730	1905	4030	6390	
700	265	690	1380	2075	3455	5760	10365	1845	3895	6175	
750	245	635	1270	1905	3170	5285	9515	1695	3570	5665	
800	195	515	1030	1545	2570	4285	7715	1375	2895	4595	
850	155	400	795	1195	1995	3320	5980	1060	2245	3560	
900	110	285	575	860	1435	2395	4305	765	1615	2565	
950	65	170	350	520	875	1485	2745	465	990	1595	
1000	40	105	220	335	570	1000	1990	295	650	1085	

### Selection Rules :

- A) Flanged-end valves may be rated 150, 300, 600, 900, 1500, and 2500 Standard Class only, 1000°F maximum.
- B) Butt weld valves may be designated as Standard Class and Special Class, or Limited Class NPS 2½ (DN 65) and smaller.
- C) Socket weld valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class.
- D) Threaded-end or combination threaded-end valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class, up to 2500 Class. The ratings terminate at 1000°F.
- E) Special Class: Requires additional inspection per ASME B16.34, para. 2.1.3.
- F) Do not interpolate Limited Class above 900°F. Consult the factory.

(1) Permissible but not recommended for prolonged usage above 800°F.

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED CARBON STEEL A105<sup>(1)</sup> — metric

### Standard Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	30	78	154	230	383	639	1149	205	432	685
	Seat	22	57	113	169	281	469	843	150	317	502
°C	Standard Class									Intermediate Standard Class	
-29 to 38	19.6	51.1	102.1	153.2	255.3	425.5	765.9	136.2	287.6	456.1	
50	19.2	50.1	100.2	150.4	250.6	417.7	751.9	133.7	282.3	447.8	
100	17.7	46.6	93.2	139.8	233.0	388.3	699.0	124.3	262.5	416.3	
150	15.8	45.1	90.2	135.2	225.4	375.6	676.1	120.2	253.9	402.6	
200	13.8	43.8	87.6	131.4	219.0	365.0	657.0	116.8	246.7	391.3	
250	12.1	41.9	83.9	125.8	209.7	349.5	629.1	111.8	236.3	374.7	
300	10.2	39.8	79.6	119.5	199.1	331.8	597.3	106.2	224.3	355.7	
325	9.3	38.7	77.4	116.1	193.6	322.6	580.7	103.2	218.1	345.8	
350	8.4	37.6	75.1	112.7	187.8	313.0	563.5	100.2	211.6	335.5	
375	7.4	36.4	72.7	109.1	181.8	303.1	545.5	97.0	204.8	324.9	
400	6.5	34.7	69.4	104.2	173.6	289.3	520.8	92.6	195.6	310.1	
425	5.5	28.8	57.5	86.3	143.8	239.7	431.5	76.7	162.0	257.0	
450	4.6	23.0	46.0	69.0	115.0	191.7	345.1	61.3	129.6	205.5	
475	3.7	17.4	34.9	52.3	87.2	145.3	261.5	46.5	98.2	155.8	
500	2.8	11.8	23.5	35.3	58.8	97.9	176.3	31.4	66.2	105.0	
538	1.4	5.9	11.8	17.7	29.5	49.2	88.6	15.7	33.2	52.7	

### Limited Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	30	78	156	233	388	647	1164	207	437	693
	Seat	22	57	114	171	285	474	854	152	321	509
°C	Limited Class									Intermediate Limited Class	
-29 to 38	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
50	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
100	19.8	51.6	103.3	154.9	258.2	430.3	774.5	137.7	290.9	461.3	
150	19.6	51.0	102.1	153.1	255.2	425.3	765.5	136.1	287.5	455.9	
200	19.4	50.6	101.1	151.7	252.9	421.4	758.6	134.8	284.9	451.7	
250	19.4	50.5	101.1	151.6	252.6	421.1	757.9	134.8	284.6	451.4	
300	19.4	50.5	101.1	151.6	252.6	421.1	757.9	134.8	284.6	451.4	
325	19.2	50.1	100.2	150.3	250.6	417.6	751.7	133.6	282.3	447.7	
350	18.7	48.9	97.8	146.7	244.6	407.6	733.7	130.4	275.6	436.9	
375	18.1	47.1	94.2	141.3	235.5	392.5	706.5	125.6	265.3	420.8	
400	16.6	43.4	86.8	130.2	217.0	361.7	651.0	115.7	244.5	387.7	
425	13.8	36.0	71.9	107.9	179.8	299.6	539.3	95.9	202.6	321.2	
450	11.0	28.8	57.5	86.3	143.8	239.6	431.4	76.7	162.0	256.9	
475	8.4	21.8	43.6	65.4	109.0	181.6	326.9	58.1	122.8	194.7	
500	5.6	14.7	29.6	44.5	74.6	125.4	230.3	39.5	84.2	134.6	
538	2.8	7.5	15.2	23.1	39.4	69.0	137.3	20.4	44.8	74.6	

### Special Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	30	78	156	233	388	647	1164	207	437	693
	Seat	22	57	114	171	285	474	854	152	321	509
°C	Special Class									Intermediate Special Class	
-29 to 38	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
50	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
100	19.8	51.6	103.3	154.9	258.2	430.3	774.5	137.7	290.9	461.3	
150	19.6	51.0	102.1	153.1	255.2	425.3	765.5	136.1	287.5	455.9	
200	19.4	50.6	101.1	151.7	252.9	421.4	758.6	134.8	284.9	451.7	
250	19.4	50.5	101.1	151.6	252.6	421.1	757.9	134.8	284.6	451.4	
300	19.4	50.5	101.1	151.6	252.6	421.1	757.9	134.8	284.6	451.4	
325	19.2	50.1	100.2	150.3	250.6	417.6	751.7	133.6	282.3	447.7	
350	18.7	48.9	97.8	146.7	244.6	407.6	733.7	130.4	275.6	436.9	
375	18.1	47.1	94.2	141.3	235.5	392.5	706.5	125.6	265.3	420.8	
400	16.6	43.4	86.8	130.2	217.0	361.7	651.0	115.7	244.5	387.7	
425	13.8	36.0	71.9	107.9	179.8	299.6	539.3	95.9	202.6	321.2	
450	11.0	28.8	57.5	86.3	143.8	239.6	431.4	76.7	162.0	256.9	
475	8.4	21.8	43.6	65.4	109.0	181.6	326.9	58.1	122.8	194.7	
500	5.6	14.7	29.6	44.5	74.6	125.4	230.3	39.5	84.2	134.6	
538	2.8	7.5	15.2	23.1	39.4	69.0	137.3	20.4	44.8	74.6	

### Selection Rules :

- A) Flanged-end valves may be rated 150, 300, 600, 900, 1500, and 2500 Standard Class only, 538°C maximum.
- B) Butt weld valves may be designated as Standard Class and Special Class, or Limited Class NPS 2½ (DN 65) and smaller.
- C) Socket weld valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class.
- D) Threaded-end or combination threaded-end valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class, up to 2500 Class. The ratings terminate at 538°C.
- E) Special Class: Requires additional inspection per ASME B16.34, para. 2.1.3.
- F) Do not interpolate Limited Class above 475°C. Consult the factory.

(1) Permissible but not recommended for prolonged usage above 425°C.

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED CHROME-MOLY STEEL A182 Gr. F22 Cl.3<sup>(1)</sup> — US customary

### Standard Class

#### Working Pressure by Classes, psig

CLASS	150	300	600	900	1500	2500	4500	800	1690	2680	
Test	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
	Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375
°F	Standard Class								Intermediate Standard Class		
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	260	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	230	730	1455	2185	3640	6070	10925	1940	4100	6505	
400	200	705	1410	2115	3530	5880	10585	1880	3975	6305	
500	170	665	1330	1995	3325	5540	9965	1775	3745	5940	
600	140	605	1210	1815	3025	5040	9070	1615	3410	5405	
650	125	590	1175	1765	2940	4905	8825	1570	3315	5260	
700	110	570	1135	1705	2840	4730	8515	1515	3200	5070	
750	95	530	1065	1595	2660	4430	7970	1420	2995	4750	
800	80	510	1015	1525	2540	4230	7610	1355	2860	4535	
850	65	485	975	1460	2435	4060	7305	1300	2745	4350	
900	50	450	900	1350	2245	3745	6740	1200	2530	4015	
950	35	385	755	1160	1930	3220	5795	1025	2175	3450	
1000	20	265	535	800	1335	2230	4010	710	1505	2390	
1050	20	175	350	525	875	1455	2625	465	985	1560	
1100	20	110	220	330	550	915	1645	295	620	980	
1150	20	70	135	205	345	570	1030	180	390	610	
1200	15	40	80	125	205	345	615	110	230	370	

### Limited Class

#### Working Pressure by Classes, psig

CLASS	150	300	600	900	1500	2500	4500	800	1690	2680	
Test	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
	Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375
°F	Limited Class								Intermediate Limited Class		
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	285	740	1480	2220	3695	6160	11090	1975	4165	6605	
400	280	730	1455	2185	3640	6065	10915	1940	4100	6500	
500	280	725	1450	2175	3620	6035	10865	1935	4080	6470	
600	275	720	1440	2165	3605	6010	10815	1925	4060	6445	
650	275	715	1430	2155	3580	5965	10735	1905	4035	6395	
700	270	705	1415	2120	3535	5895	10605	1885	3985	6320	
750	270	705	1415	2120	3535	5895	10605	1885	3985	6320	
800	270	705	1415	2120	3535	5895	10605	1885	3985	6320	
850	260	680	1355	2030	3385	5645	10160	1805	3815	6050	
900	230	600	1200	1800	3000	5000	9000	1600	3380	5360	
950	180	470	955	1435	2410	4075	7555	1275	2725	4385	
1000	130	340	690	1045	1785	3120	6215	925	2025	3370	
1050	85	225	445	680	1170	2040	4065	600	1330	2205	
1100	55	135	280	425	730	1280	2545	380	830	1385	
1150	35	85	175	265	460	800	1590	235	525	865	
1200	20	50	110	160	275	480	955	145	305	520	

### Special Class

#### Working Pressure by Classes, psig

CLASS	150	300	600	900	1500	2500	4500	800	1690	2680	
Test	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
	Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375
°F	Special Class								Intermediate Special Class		
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	285	740	1480	2220	3695	6160	11090	1975	4165	6605	
400	280	730	1455	2185	3640	6065	10915	1940	4100	6500	
500	280	725	1450	2175	3620	6035	10865	1935	4080	6470	
600	275	720	1440	2165	3605	6010	10815	1925	4060	6445	
650	275	715	1430	2155	3580	5965	10735	1905	4035	6395	
700	270	705	1415	2120	3535	5895	10605	1885	3985	6320	
750	270	705	1415	2120	3535	5895	10605	1885	3985	6320	
800	270	705	1415	2120	3535	5895	10605	1885	3985	6320	
850	260	680	1355	2030	3385	5645	10160	1805	3815	6050	
900	230	600	1200	1800	3000	5000	9000	1600	3380	5360	
950	180	470	955	1435	2410	4075	7555	1275	2725	4385	
1000	130	340	690	1045	1785	3120	6215	925	2025	3370	
1050	85	225	445	680	1170	2040	4065	600	1330	2205	
1100	55	135	280	425	730	1280	2545	380	830	1385	
1150	35	85	175	265	460	800	1590	235	525	865	
1200	20	50	110	160	275	480	955	145	305	520	

### Selection Rules :

- A) Flanged-end valves may be rated 150, 300, 600, 900, 1500, and 2500 Standard Class only, 1000°F maximum.
- B) Butt weld valves may be designated as Standard Class and Special Class, or Limited Class NPS 2½ (DN 65) and smaller.
- C) Socket weld valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class.
- D) Threaded-end or combination threaded-end valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class, up to 2500 Class. The ratings terminate at 1000°F.
- E) Special Class: Requires additional inspection per ASME B16.34, para. 2.1.3.
- F) Do not interpolate Limited Class above 900°F. Consult the factory.

(1) Permissible but not recommended for prolonged usage above 1100°F.

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED CHROME-MOLY STEEL A182 Gr. F22 Cl.3<sup>(1)</sup> — metric

### Standard Class

Test	CLASS	Working Pressure by Classes, bar									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	30	78	156	233	388	647	1164	207	437	693
Seat	22	57	114	171	285	474	854	152	321	509	
°C	Standard Class										Intermediate Standard Class
-29 to 38	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
50	19.5	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
100	17.7	51.5	103.0	154.6	257.6	429.4	773.0	137.4	290.3	460.4	
150	15.8	50.3	100.3	150.6	250.8	418.2	752.8	133.8	282.7	448.3	
200	13.8	48.6	97.2	145.8	243.4	405.4	729.8	129.7	274.1	434.6	
250	12.1	46.3	92.7	139.0	231.8	386.2	694.8	123.5	260.9	413.8	
300	10.2	42.9	85.7	128.6	214.4	357.1	642.6	114.2	241.3	382.7	
325	9.3	41.4	82.6	124.0	206.6	344.3	619.6	110.2	232.7	369.0	
350	8.4	40.3	80.4	120.7	201.1	335.3	603.3	107.3	226.6	359.3	
375	7.4	38.9	77.6	116.5	194.1	323.2	581.8	103.4	218.5	346.5	
400	6.5	36.5	73.3	109.8	183.1	304.9	548.5	97.5	206.0	326.7	
425	5.5	35.2	70.0	105.1	175.1	291.6	524.7	93.3	197.1	312.5	
450	4.6	33.7	67.7	101.4	169.0	281.8	507.0	90.1	190.4	301.9	
475	3.7	31.7	63.4	95.1	158.2	263.9	474.8	84.4	178.3	282.8	
500	2.8	28.2	56.5	84.7	140.9	235.0	423.0	75.2	158.9	251.9	
538	1.4	18.4	36.9	55.3	92.2	153.7	276.6	49.2	103.9	164.7	
550	1.4	15.6	31.3	46.9	78.2	130.3	234.5	41.7	88.1	139.7	
575	1.4	10.5	21.1	31.6	52.6	87.7	157.9	28.1	59.3	94.0	
600	1.4	6.9	13.8	20.7	34.4	57.4	103.3	18.4	38.8	61.5	
625	1.4	4.5	8.9	13.4	22.3	37.2	66.9	11.9	25.1	39.8	
650	1.4	2.8	5.7	8.5	14.2	23.6	42.6	7.6	16.0	25.4	

### Limited Class

Test	CLASS	Working Pressure by Classes, bar									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	30	78	156	233	388	647	1164	207	437	693
Seat	22	57	114	171	285	474	854	152	321	509	
°C	Limited Class										Intermediate Limited Class
-29 to 38	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
50	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
100	19.8	51.6	103.2	154.9	258.1	430.2	774.3	137.7	290.8	461.1	
150	19.5	51.0	101.9	152.9	254.8	424.6	764.3	135.9	287.0	455.2	
200	19.3	50.2	100.4	150.7	251.1	418.5	753.4	133.9	282.9	448.7	
250	19.2	50.0	100.0	149.9	249.9	416.5	749.7	133.3	281.6	446.5	
300	19.1	49.8	99.6	149.3	248.9	414.8	746.7	132.7	280.4	444.7	
325	19.0	49.6	99.2	148.8	248.0	413.3	743.9	132.2	279.4	443.0	
350	18.9	49.2	98.4	147.6	246.0	410.0	738.1	131.2	277.2	439.6	
375	18.7	48.8	97.5	146.3	243.8	406.3	731.3	130.0	274.6	435.5	
400	18.7	48.8	97.5	146.3	243.8	406.3	731.3	130.0	274.6	435.5	
425	18.7	48.8	97.5	146.3	243.8	406.3	731.3	130.0	274.6	435.5	
450	18.1	47.3	94.4	141.4	235.8	393.1	707.6	125.8	265.7	421.4	
475	16.4	42.8	85.5	128.2	213.7	356.3	641.3	114.0	240.8	381.9	
500	13.7	35.7	71.9	108.0	181.2	304.8	559.4	95.9	204.4	327.3	
538	8.8	23.3	47.3	71.9	123.1	215.2	428.3	63.7	139.9	232.6	
550	7.5	19.8	40.1	61.0	104.4	182.3	363.1	53.9	118.7	197.3	
575	5.0	13.4	27.0	41.1	70.3	122.9	244.6	36.3	79.9	132.9	
600	3.3	8.7	17.7	26.8	46.0	80.3	159.9	23.8	52.3	86.9	
625	2.1	5.7	11.5	17.4	29.8	52.1	103.7	15.4	33.9	56.3	
650	1.4	3.5	7.3	11.0	18.9	33.0	65.9	9.8	21.6	35.8	

### Special Class

Test	CLASS	Working Pressure by Classes, bar									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	30	78	156	233	388	647	1164	207	437	693
Seat	22	57	114	171	285	474	854	152	321	509	
°C	Special Class										Intermediate Special Class
-29 to 38	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
50	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
100	19.8	51.6	103.2	154.9	258.1	430.2	774.3	137.7	290.8	461.1	
150	19.5	51.0	101.9	152.9	254.8	424.6	764.3	135.9	287.0	455.2	
200	19.3	50.2	100.4	150.7	251.1	418.5	753.4	133.9	282.9	448.7	
250	19.2	50.0	100.0	149.9	249.9	416.5	749.7	133.3	281.6	446.5	
300	19.1	49.8	99.6	149.3	248.9	414.8	746.7	132.7	280.4	444.7	
325	19.0	49.6	99.2	148.8	248.0	413.3	743.9	132.2	279.4	443.0	
350	18.9	49.2	98.4	147.6	246.0	410.0	738.1	131.2	277.2	439.6	
375	18.7	48.8	97.5	146.3	243.8	406.3	731.3	130.0	274.6	435.5	
400	18.7	48.8	97.5	146.3	243.8	406.3	731.3	130.0	274.6	435.5	
425	18.7	48.8	97.5	146.3	243.8	406.3	731.3	130.0	274.6	435.5	
450	18.1	47.3	94.4	141.4	235.8	393.1	707.6	125.8	265.7	421.4	
475	16.4	42.8	85.5	128.2	213.7	356.3	641.3	114.0	240.8	381.9	
500	13.7	35.7	71.9	108.0	181.2	304.8	559.4	95.9	204.4	327.3	
538	8.8	23.3	47.3	71.9	123.1	215.2	428.3	63.7	139.9	232.6	
550	7.5	19.8	40.1	61.0	104.4	182.3	363.1	53.9	118.7	197.3	
575	5.0	13.4	27.0	41.1	70.3	122.9	244.6	36.3	79.9	132.9	
600	3.3	8.7	17.7	26.8	46.0	80.3	159.9	23.8	52.3	86.9	
625	2.1	5.7	11.5	17.4	29.8	52.1	103.7	15.4	33.9	56.3	
650	1.4	3.5	7.3	11.0	18.9	33.0	65.9	9.8	21.6	35.8	

### Selection Rules :

- A) Flanged-end valves may be rated 150, 300, 600, 900, 1500, and 2500 Standard Class only, 538°C maximum.
- B) Butt weld valves may be designated as Standard Class and Special Class, or Limited Class NPS 2½ (DN 65) and smaller.
- C) Socket weld valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class.
- D) Threaded-end or combination threaded-end valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class, up to 2500 Class. The ratings terminate at 538°C.
- E) Special Class: Requires additional inspection per ASME B16.34, para. 2.1.3.
- F) Do not interpolate Limited Class above 475°C. Consult the factory.

(1) Permissible but not recommended for prolonged usage above 595°C.

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED STAINLESS STEEL A182 Gr. F316<sup>(1)</sup> – US customary

### Standard Class

	Working Pressure by Classes, psig										
CLASS	150	300	600	900	1500	2500	4500	800	1690	2680	
Test	Shell	425	1100	2175	3250	5400	9000	16200	2900	6100	9650
Test	Seat	325	800	1600	2400	3975	6600	11900	2125	4475	7075
°F	Standard Class					Intermediate Standard Class					
-20 to 100	275	720	1440	2160	3600	6000	10800	1920	4055	6430	
200	235	620	1240	1860	3095	5160	9290	1655	3485	5530	
300	215	560	1120	1680	2795	4660	8390	1495	3150	4995	
400	195	515	1025	1540	2570	4280	7705	1370	2895	4590	
500	170	480	955	1435	2390	3980	7165	1275	2690	4265	
600	140	450	900	1355	2255	3760	6770	1205	2540	4030	
650	125	440	885	1325	2210	3680	6625	1180	2490	3945	
700	110	435	870	1305	2170	3620	6515	1160	2445	3880	
750	95	425	855	1280	2135	3560	6410	1140	2405	3815	
800	80	420	845	1265	2110	3520	6335	1125	2380	3775	
850	65	420	835	1255	2090	3480	6265	1115	2355	3730	
900	50	415	830	1245	2075	3460	6230	1105	2340	3710	
950	35	385	775	1160	1930	3220	5795	1030	2175	3450	
1000	20	365	725	1090	1820	3030	5450	970	2050	3250	
1050	20	360	720	1080	1800	3000	5400	960	2030	3215	
1100	20	305	610	915	1525	2545	4575	815	1720	2730	
1150	20	235	475	710	1185	1970	3550	630	1335	2110	
1200	20	185	370	555	925	1545	2775	495	1045	1655	
1250	20	145	295	440	735	1230	2210	390	830	1320	
1300	20	115	235	350	585	970	1750	310	660	1040	
1350	20	95	190	290	480	800	1440	255	540	860	
1400	20	75	150	225	380	630	1130	200	430	675	
1450	20	60	115	175	290	485	875	155	325	520	
1500	15	40	85	125	205	345	620	110	230	370	

### Special Class

	Working Pressure by Classes, psig										
CLASS	150	300	600	900	1500	2500	4500	800	1690	2680	
Test	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
Test	Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375
°F	Standard Class					Intermediate Standard Class					
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	265	690	1380	2075	3455	5760	10365	1845	3895	6175	
300	240	625	1250	1870	3120	5200	9360	1665	3515	5575	
400	220	575	1145	1720	2865	4775	8600	1530	3230	5120	
500	205	535	1065	1600	2665	4440	7995	1420	3005	4760	
600	195	505	1005	1510	2520	4195	7555	1340	2840	4495	
650	190	495	985	1480	2465	4105	7395	1315	2775	4400	
700	185	485	970	1455	2425	4040	7270	1295	2730	4330	
750	185	475	955	1430	2385	3975	7150	1270	2685	4260	
800	180	470	945	1415	2355	3930	7070	1260	2655	4215	
850	180	465	930	1400	2330	3885	6990	1245	2625	4165	
900	180	465	925	1390	2315	3860	6950	1235	2610	4140	
950	175	460	915	1375	2290	3815	6870	1220	2580	4090	
1000	160	420	840	1260	2105	3505	6310	1120	2370	3755	
1050	160	420	840	1260	2105	3505	6310	1120	2370	3755	
1100	145	380	770	1160	1945	3300	6115	1030	2200	3545	
1150	115	300	605	920	1580	2760	5495	815	1795	2985	
1200	90	235	475	725	1235	2160	4300	640	1400	2340	
1250	70	185	380	575	985	1720	3425	515	1115	1860	
1300	55	145	300	450	780	1360	2705	400	885	1470	
1350	45	120	245	375	640	1120	2230	330	730	1210	
1400	35	95	195	295	500	880	1755	265	570	950	
1450	30	75	150	230	390	680	1355	200	440	735	
1500	20	50	110	160	280	480	955	145	320	520	

### Limited Class

	Working Pressure by Classes, psig										
CLASS	150	300	600	900	1500	2500	4500	800	1690	2680	
Test	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
Test	Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375
°F	Limited Class					Intermediate Limited Class					
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	265	690	1380	2075	3455	5760	10365	1845	3895	6175	
300	240	625	1250	1870	3120	5200	9360	1665	3515	5575	
400	220	575	1145	1720	2865	4775	8600	1530	3230	5120	
500	205	535	1065	1600	2665	4440	7995	1420	3005	4760	
600	195	505	1005	1510	2520	4195	7555	1340	2840	4495	
650	190	495	985	1480	2465	4105	7395	1315	2775	4400	
700	185	485	970	1455	2425	4040	7270	1295	2730	4330	
750	185	475	955	1430	2385	3975	7150	1270	2685	4260	
800	180	470	945	1415	2355	3930	7070	1260	2655	4215	
850	180	465	930	1400	2330	3885	6990	1245	2625	4165	
900	180	465	925	1390	2315	3860	6950	1235	2610	4140	
950	175	460	915	1375	2290	3815	6870	1220	2580	4090	
1000	160	420	840	1260	2105	3505	6310	1120	2370	3755	
1050	160	420	840	1260	2105	3505	6310	1120	2370	3755	
1100	145	380	770	1160	1945	3300	6115	1030	2200	3545	
1150	115	300	605	920	1580	2760	5495	815	1795	2985	
1200	90	235	475	725	1235	2160	4300	640	1400	2340	
1250	70	185	380	575	985	1720	3425	515	1115	1860	
1300	55	145	300	450	780	1360	2705	400	885	1470	
1350	45	120	245	375	640	1120	2230	330	730	1210	
1400	35	95	195	295	500	880	1755	265	570	950	
1450	30	75	150	230	390	680	1355	200	440	735	
1500	20	50	110	160	280	480	955	145	320	520	

### Selection Rules :

- A) Flanged-end valves may be rated 150, 300, 600, 900, 1500, and 2500 Standard Class only, 1000°F maximum.
- B) Butt weld valves may be designated as Standard Class and Special Class, or Limited Class NPS 2½ (DN 65) and smaller.
- C) Socket weld valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class.
- D) Threaded-end or combination threaded-end valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class, up to 2500 Class. The ratings terminate at 1000°F.
- E) Special Class: Requires additional inspection per ASME B16.34, para. 2.1.3.
- F) Do not interpolate Limited Class above 1000°F. Consult the factory.

(1) At temperatures over 1000°F use only when the carbon content is 0.04% or higher (material code 10).

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED STAINLESS STEEL A182 Gr. F316<sup>(1)</sup> — metric

### Standard Class

Test	CLASS	Working Pressure by Classes, bar									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	29	75	149	224	373	621	1117	199	420	666
Seat	21	55	110	164	274	456	820	146	308	488	
°C	Standard Class										Intermediate Standard Class
-29 to 38	19.0	49.6	99.3	148.9	248.2	413.7	744.6	132.4	279.6	443.5	
50	18.4	48.1	96.2	144.3	240.6	400.9	721.7	128.3	271.0	429.8	
100	16.2	42.2	84.4	126.6	211.0	351.6	632.9	112.5	237.7	376.9	
150	14.8	38.5	77.0	115.5	192.5	320.8	577.4	102.6	216.8	343.9	
200	13.7	35.7	71.3	107.0	178.3	297.2	534.9	95.1	200.9	318.6	
250	12.1	33.4	66.8	100.1	166.9	278.1	500.6	89.0	188.0	298.1	
300	10.2	31.6	63.2	94.9	158.1	263.5	474.3	84.3	178.1	282.5	
325	9.3	30.9	61.8	92.7	154.4	257.4	463.3	82.4	174.0	275.9	
350	8.4	30.3	60.7	91.0	151.6	252.7	454.9	80.9	170.8	270.9	
375	7.4	29.9	59.8	89.6	149.4	249.0	448.2	79.7	168.3	266.9	
400	6.5	29.4	58.9	88.3	147.2	245.3	441.6	78.5	165.8	263.0	
425	5.5	29.1	58.3	87.4	145.7	242.9	437.1	77.7	164.2	260.3	
450	4.6	28.8	57.7	86.5	144.2	240.4	432.7	76.9	162.5	257.7	
475	3.7	28.7	57.3	86.0	143.4	238.9	430.1	76.5	161.5	256.1	
500	2.8	28.2	56.5	84.7	140.9	235.0	423.0	75.2	158.9	251.9	
538	1.4	25.2	50.0	75.2	125.5	208.9	375.8	66.8	141.1	223.8	
550	1.4	25.0	49.8	74.8	124.9	208.0	374.2	66.5	140.5	222.9	
575	1.4	24.0	47.9	71.8	119.7	199.5	359.1	63.8	134.9	213.9	
600	1.4	19.9	39.8	59.7	99.5	165.9	298.6	53.1	112.1	177.8	
625	1.4	15.8	31.6	47.4	79.1	131.8	237.2	42.2	89.1	141.3	
650	1.4	12.7	25.3	38.0	63.3	105.5	189.9	33.8	71.3	113.1	
675	1.4	10.3	20.6	31.0	51.6	86.0	154.8	27.5	58.1	92.2	
700	1.4	8.4	16.8	25.1	41.9	69.8	125.7	22.3	47.2	74.9	
725	1.4	7.0	14.0	21.0	34.9	58.2	104.8	18.6	39.4	62.4	
750	1.4	5.9	11.7	17.6	29.3	48.9	87.9	15.6	33.0	52.3	
775	1.4	4.6	9.0	13.7	22.8	38.0	68.4	12.2	25.7	40.7	
800	1.2	3.5	7.0	10.5	17.4	29.2	52.6	9.4	19.8	31.3	
816	1.0	2.8	5.9	8.6	14.1	23.8	42.7	7.6	16.0	25.4	

### Limited Class

Test	CLASS	Working Pressure by Classes, bar									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	30	78	156	233	388	647	1164	207	437	693
Seat	22	57	114	171	285	474	854	152	321	509	
°C	Limited Class										Intermediate Limited Class
-29 to 38	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
50	19.5	50.8	101.6	152.5	254.1	423.5	762.3	135.5	286.3	454.0	
100	18.1	47.1	94.2	141.3	235.5	392.4	706.4	125.6	265.3	420.7	
150	16.5	43.0	85.9	128.9	214.8	358.0	644.4	114.6	242.0	383.8	
200	15.3	39.8	79.6	119.4	199.0	331.7	597.0	106.1	224.2	355.5	
250	14.3	37.3	74.5	111.8	186.3	310.4	558.8	99.3	209.9	332.8	
300	13.5	35.3	70.6	105.9	176.4	294.1	529.3	94.1	198.8	315.2	
325	13.2	34.5	68.9	103.4	172.3	287.2	517.0	91.9	194.2	307.9	
350	13.0	33.8	67.7	101.5	169.2	282.1	507.7	90.3	190.7	302.4	
375	12.8	33.3	66.7	100.0	166.7	277.9	500.2	88.9	187.9	297.9	
400	12.6	32.9	65.7	98.6	164.3	273.8	492.9	87.6	185.1	293.5	
425	12.5	32.5	65.1	97.6	162.6	271.1	487.9	86.7	183.2	290.6	
450	12.3	32.2	64.4	96.6	161.0	268.3	482.9	85.8	181.4	287.6	
475	12.3	32.0	64.0	96.0	160.0	266.6	480.0	85.3	180.3	285.9	
500	12.2	31.7	63.4	95.1	158.6	264.3	475.7	84.6	178.7	283.3	
538	11.0	29.0	57.9	86.9	145.1	241.7	421.7	86.9	163.4	259.1	
550	11.0	29.0	57.9	86.9	145.1	241.7	421.7	86.9	163.4	259.1	
575	10.9	28.6	57.3	86.1	144.0	241.2	438.2	76.5	162.3	258.7	
600	9.5	25.1	50.4	76.0	128.2	218.2	410.1	67.4	145.1	234.9	
625	7.6	20.1	40.5	61.7	105.6	184.5	367.3	54.6	120.1	199.5	
650	6.1	16.0	32.5	49.4	84.5	147.7	294.1	43.7	96.2	159.7	
675	4.9	13.1	26.5	40.3	68.9	120.4	239.7	35.6	78.4	130.1	
700	4.4	11.5	23.4	35.7	61.0	106.6	212.2	31.6	69.3	115.2	
725	3.7	9.6	19.6	29.7	51.0	89.0	177.2	26.3	57.9	96.3	
750	2.8	7.5	15.2	23.0	39.2	68.5	136.7	20.3	44.6	74.2	
775	2.2	5.9	11.7	17.9	30.5	53.3	106.1	15.7	34.6	57.6	
800	1.8	4.5	9.0	13.7	23.5	41.0	81.3	12.1	26.5	44.2	
816	1.4	3.4	7.4	11.1	19.1	33.2	65.8	9.7	21.5	35.7	

### Special Class

Test	CLASS	Working Pressure by Classes, bar									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	30	78	156	233	388	647	1164	207	437	693
Seat	22	57	114	171	285	474	854	152	321	509	
°C	Special Class										Intermediate Special Class
-29 to 38	19.8	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	462.0	
50	19.5	50.8	101.6	152.5	254.1	423.5	762.3	135.5	286.3	454.0	
100	18.1	47.1	94.2	141.3	235.5	392.4	706.4	125.6	265.3	420.7	
150	16.5	43.0	85.9	128.9	214.8	358.0	644.4	114.6	242.0	383.8	
200	15.3	39.8	79.6	119.4	199.0	331.7	597.0	106.1	224.2	355.5	
250	14.3	37.3	74.5	111.8	186.3	310.4	558.8	99.3	209.9	332.8	
300	13.5	35.3	70.6	105.9	176.4	294.1	529.3	94.1	198.8	315.2	
325	13.2	34.5	68.9	103.4	172.3	287.2	517.0	91.9	194.2	307.9	
350	13.0	33.8	67.7	101.5	169.2	282.1	507.7	90.3	190.7	302.4	
375	12.8	33.3	66.7	100.0	166.7	277.9	500.2	88.9	187.9	297.9	
400	12.6	32.9	65.7	98.6	164.3	273.8	492.9	87.6	185.1	293.5	
425	12.5	32.5	65.1	97.6	162.6	271.1	487.9	86.7	183.2	290.6	
450	12.3	32.2	64.4	96.6	161.0	268.3	482.9	85.8	181.4	287.6	
475	12.3	32.0	64.0	96.0	160.0	266.6	480.0	85.3	180.3	285.9	
500	12.2	31.7	63.4	95.1	158.6	264.3	475.7	84.6	178.7	283.3	
538	11.0	29.0	57.9	86.9	145.1	241.7	435.1	77.4	163.4	259.1	
550	11.0	29.0	57.9	86.9	145.1	241.7	435.1	77.4	163.4	259.1	
575	10.9	28.6	57.3	86.1	144.0	241.2	438.2	76.5	162.3	258.7	
600	9.5	25.1	50.4	76.0	128.						

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED CHROME-MOLY STEEL A182 Gr. F91 – US customary

### Standard Class

Test	CLASS	Working Pressure by Classes, psig									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375	
°F	Standard Class					Intermediate Standard Class					
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	260	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	230	730	1455	2185	3640	6070	10925	1940	4100	6505	
400	200	705	1410	2115	3530	5880	10585	1880	3975	6305	
500	170	665	1330	1995	3325	5540	9965	1775	3745	5940	
600	140	605	1210	1815	3025	5040	9070	1615	3410	5405	
650	125	590	1175	1765	2940	4905	8825	1570	3315	5260	
700	110	570	1135	1705	2840	4730	8515	1515	3200	5070	
750	95	530	1065	1595	2660	4430	7970	1420	2995	4750	
800	80	510	1015	1525	2540	4230	7610	1355	2860	4535	
850	65	485	975	1460	2435	4060	7305	1300	2745	4350	
900	50	450	900	1350	2245	3745	6740	1200	2530	4015	
950	35	385	775	1160	1930	3220	5795	1030	2175	3450	
1000	20	365	725	1090	1820	3030	5450	970	2050	3250	
1050	20	360	720	1080	1800	3000	5400	960	2030	3215	
1100	20	300	605	905	1510	2515	4525	805	1700	2695	
1150	20	225	445	670	1115	1855	3345	595	1255	1990	
1200	20	145	290	430	720	1200	2160	385	810	1285	

### Limited Class

Test	CLASS	Working Pressure by Classes, psig									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375	
°F	Limited Class					Intermediate Limited Class					
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
400	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
500	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
600	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
650	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
700	280	735	1465	2200	3665	6110	10995	1955	4130	6550	
750	280	730	1460	2185	3645	6070	10930	1945	4105	6505	
800	275	720	1440	2160	3600	6000	10800	1920	4055	6430	
850	260	680	1355	2030	3385	5645	10160	1805	3815	6050	
900	230	600	1200	1800	3000	5000	9000	1600	3380	5360	
950	180	470	955	1435	2410	4075	7555	1275	2725	4385	
1000	160	425	860	1310	2250	3925	7820	1160	2555	4240	
1050	160	425	860	1310	2250	3925	7820	1160	2555	4240	
1100	145	380	775	1175	2015	3520	7005	1040	2290	3805	
1150	105	285	570	870	1490	2600	5180	765	1695	2805	
1200	70	180	370	560	960	1680	3345	495	1095	1820	

### Special Class

Test	CLASS	Working Pressure by Classes, psig									
		150	300	600	900	1500	2500	4500	800	1690	2680
	Shell	450	1125	2250	3375	5625	9375	16875	3000	6350	10050
Seat	325	825	1650	2475	4125	6875	12375	2200	4650	7375	
°F	Special Class					Intermediate Special Class					
-20 to 100	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
200	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
300	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
400	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
500	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
600	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
650	290	750	1500	2250	3750	6250	11250	2000	4225	6700	
700	280	735	1465	2200	3665	6110	10995	1955	4130	6550	
750	280	730	1460	2185	3645	6070	10930	1945	4105	6505	
800	275	720	1440	2160	3600	6000	10800	1920	4055	6430	
850	260	680	1355	2030	3385	5645	10160	1805	3815	6050	
900	230	600	1200	1800	3000	5000	9000	1600	3380	5360	
950	180	470	955	1435	2410	4075	7555	1275	2725	4385	
1000	160	425	860	1310	2250	3925	7820	1160	2555	4240	
1050	160	425	860	1310	2250	3925	7820	1160	2555	4240	
1100	145	380	775	1175	2015	3520	7005	1040	2290	3805	
1150	105	285	570	870	1490	2600	5180	765	1695	2805	
1200	70	180	370	560	960	1680	3345	495	1095	1820	

### Selection Rules :

- A) Flanged-end valves may be rated 150, 300, 600, 900, 1500, and 2500 Standard Class only, 1000°F maximum.
- B) Butt weld valves may be designated as Standard Class and Special Class, or Limited Class NPS 2½ (DN 65) and smaller.
- C) Socket weld valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class.
- D) Threaded-end or combination threaded-end valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class, up to 2500 Class. The ratings terminate at 1000°F.
- E) Special Class: Requires additional inspection per ASME B16.34, para. 2.1.3.
- F) Do not interpolate Limited Class above 900°F. Consult the factory.

# ENGINEERING DATA ASME B16.34 PRESSURE TEMPERATURE RATINGS

## FORGED CHROME-MOLY STEEL A182 Gr. F91 — metric

### Standard Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	30	78	156	233	388	647	1164	207	437	693
	Seat	22	57	114	171	285	474	854	152	321	509
°C	Standard Class								Intermediate Standard Class		
-29 to 38											
50	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
100	19.5	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
150	17.7	51.5	103.0	154.6	257.6	429.4	773.0	137.4	290.2	460.3	
200	15.8	50.3	100.3	150.6	250.8	418.2	752.8	133.8	282.6	448.3	
250	13.8	48.6	97.2	145.8	243.4	405.4	729.8	129.6	274.2	434.6	
300	12.1	46.3	92.7	139.0	231.8	386.2	694.8	123.6	261.1	414.0	
325	10.2	42.9	85.7	128.6	214.4	357.1	642.6	114.3	241.5	382.8	
350	9.3	41.4	82.6	124.0	206.6	344.3	619.6	110.2	232.8	369.1	
375	8.4	40.3	80.4	120.7	201.1	335.3	603.3	107.3	226.6	359.4	
400	7.4	38.9	77.6	116.5	194.1	323.2	581.8	103.5	218.6	346.5	
425	6.5	36.5	73.3	109.8	183.1	304.9	548.5	97.6	206.2	326.8	
450	5.5	35.2	70.0	105.1	175.1	291.6	524.7	93.4	197.2	312.6	
475	4.6	33.7	67.7	101.4	169.0	281.8	507.0	90.2	190.4	302.1	
500	3.7	31.7	63.4	95.1	158.2	263.9	474.8	84.5	178.3	282.9	
525	2.8	28.2	56.5	84.7	140.9	235.0	423.0	75.3	158.8	251.9	
550	1.4	25.2	50.0	75.2	125.5	208.9	375.8	66.8	141.3	223.9	
575	1.40	25.0	49.8	74.8	124.9	208.0	374.2	66.5	140.7	223.0	
600	1.40	24.0	47.9	71.8	119.7	199.5	359.1	63.8	134.9	213.9	
625	1.40	19.5	39.0	58.5	97.5	162.5	292.5	52.0	109.8	174.2	
650	1.40	14.6	29.2	43.8	73.0	121.7	219.1	38.9	82.3	130.5	
675	1.40	9.9	19.9	29.8	49.6	82.7	148.9	26.5	55.9	88.7	

### Limited Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	30	78	156	233	388	647	1164	207	437	693
	Seat	22	57	114	171	285	474	854	152	321	509
°C	Limited Class								Intermediate Limited Class		
-29 to 38											
50	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
100	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
150	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
200	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
250	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
300	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
325	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
350	19.8	51.5	102.8	154.3	257.1	428.6	771.4	137.1	289.7	459.5	
375	19.3	50.6	101.0	151.5	252.5	420.9	757.4	134.7	284.5	451.2	
400	19.3	50.3	100.6	150.6	251.2	418.3	753.2	133.9	282.9	448.4	
425	19.0	49.6	99.3	148.9	248.2	413.7	744.6	132.4	279.6	443.5	
450	18.1	47.3	94.4	141.4	235.8	393.1	707.6	125.7	265.7	421.4	
475	16.4	42.8	85.5	128.2	213.7	356.3	641.3	114.0	240.8	381.9	
500	13.7	35.7	71.9	108.0	181.2	304.8	559.4	95.9	204.5	327.3	
538	11.1	29.4	59.4	90.4	155.1	270.7	539.1	79.9	176.3	292.7	
550	11.1	29.4	59.4	90.4	155.1	270.7	539.1	79.9	176.3	292.7	
575	11.0	29.0	58.6	89.1	152.8	266.9	531.3	78.9	173.7	288.5	
600	9.3	24.7	50.0	76.0	130.3	227.5	453.0	67.3	148.0	245.9	
625	7.0	18.5	37.5	57.0	97.6	170.4	339.2	50.4	110.9	184.3	
650	4.8	12.6	25.5	38.7	66.4	115.8	230.7	34.3	75.4	125.3	

### Special Class

CLASS		150	300	600	900	1500	2500	4500	800	1690	2680
Test	Shell	30	78	156	233	388	647	1164	207	437	693
	Seat	22	57	114	171	285	474	854	152	321	509
°C	Special Class								Intermediate Special Class		
-29 to 38											
50	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
100	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
150	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
200	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
250	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
300	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
325	20.0	51.7	103.4	155.1	258.6	430.9	775.7	137.9	291.3	461.9	
350	19.8	51.5	102.8	154.3	257.1	428.6	771.4	137.1	289.7	459.5	
375	19.3	50.6	101.0	151.5	252.5	420.9	757.4	134.7	284.5	451.2	
400	19.3	50.3	100.6	150.6	251.2	418.3	753.2	133.9	282.9	448.4	
425	19.0	49.6	99.3	148.9	248.2	413.7	744.6	132.4	279.6	443.5	
450	18.1	47.3	94.4	141.4	235.8	393.1	707.6	125.7	265.7	421.4	
475	16.4	42.8	85.5	128.2	213.7	356.3	641.3	114.0	240.8	381.9	
500	13.7	35.7	71.9	108.0	181.2	304.8	559.4	95.9	204.5	327.3	
538	11.1	29.4	59.4	90.4	155.1	270.7	539.1	79.9	176.3	292.7	
550	11.1	29.4	59.4	90.4	155.1	270.7	539.1	79.9	176.3	292.7	
575	11.0	29.0	58.6	89.1	152.8	266.9	531.3	78.9	173.7	288.5	
600	9.3	24.7	50.0	76.0	130.3	227.5	453.0	67.3	148.0	245.9	
625	7.0	18.5	37.5	57.0	97.6	170.4	339.2	50.4	110.9	184.3	
650	4.8	12.6	25.5	38.7	66.4	115.8	230.7	34.3	75.4	125.3	

- Selection Rules :**
- A) Flanged-end valves may be rated 150, 300, 600, 900, 1500, and 2500 Standard Class only, 538°C maximum.
  - B) Butt weld valves may be designated as Standard Class and Special Class, or Limited Class NPS 2½ (DN 65) and smaller.
  - C) Socket weld valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class.
  - D) Threaded-end or combination threaded-end valves are limited to NPS 2½ (DN 65) and smaller and may be designated as Standard Class, Special Class, or Limited Class, up to 2500 Class. The ratings terminate at 538°C.
  - E) Special Class: Requires additional inspection per ASME B16.34, para. 2.1.3.
  - F) Do not interpolate Limited Class above 475°C. Consult the factory.

# ENGINEERING DATA

## Cv FLOW COEFFICIENT TABLES

SIZE		Bolted bonnet, welded bonnet gate and bellows seal gate Standard port				Bolted bonnet and welded bonnet gate Full Port		Y-pattern bonnetless globe		Bolted bonnet globe 45° incl.	Welded bonnet globe 45° incl.
NPS	DN	150-800	1500-1690 <sup>(1)</sup>	2500 <sup>(2)</sup>	4500 <sup>(2)</sup>	800	1500-1690 <sup>(1)</sup>	1690-2680	4500	800-1690	1690-2680
1/4 <sup>(3)</sup>	8	2	2	—	—	2	2	1.3	1.0	—	—
3/8 <sup>(3)</sup>	10	2.6	5	—	—	5	5	2.4	1.3	—	—
1/2 <sup>(3)</sup>	15	5	10	14	—	10	10	2.9	1.5	3.4	3.4
3/4	20	10	10	14	25	20	20	5.0	3.0	5.8	5.8
1	25	20	20	30	25	58	58	9.8	6.0	15	15
1 1/4	32	90	90	58	48	90	90	20	9.8	26.5	26.5
1 1/2	40	90	90	58	48	100	100	20	25	27	27
2 <sup>(5)</sup>	50	—	—	—	—	—	—	34	—	—	—
2	50	100	100	160	92	220	220	60	26	50	50
2 1/2	65	—	—	—	—	—	—	60	47	—	—
3	80	—	—	—	—	—	—	60	47	—	—
4	100	—	—	—	—	—	—	60	47	—	—

SIZE		Bolted bonnet, welded bonnet globe vertical and angle		Bolted bonnet and welded bonnet bellows seal globe	Y-pattern bellows seal globe	Bolted bonnet angle globe (boiler blowoff)	Bolted bonnet 45° incl. globe (boiler blowoff)	Swing check	Piston check (vertical)	Piston check (inclined)		
NPS	DN	150-800	1500-1690 <sup>(1)</sup>	150-800	1500-2500	600-1500	600-1500	150-800	150-800	900-1500	1690-2680	4500
1/4 <sup>(3)</sup>	8	1	1	—	—	—	—	—	1.8	2	1.0	—
3/8 <sup>(3)</sup>	10	2	2	—	—	—	—	—	1.8	2	1.8	1.5
1/2 <sup>(3)</sup>	15	2	2	2.5	5	5	—	4	2	3	2.1	2.1
3/4	20	3	3	3.5	6	9	—	4	3	4	4.3	4.3
1	25	6	6	4.5	7	20	10	11	6	6	8.4	4.3
1 1/4	32	14	14	8.3	15	33	—	32	14	14	17	—
1 1/2	40	14	14	8.3	17	30	60	32	14	14	19	18
2 <sup>(5)</sup>	50	—	—	—	—	—	—	—	—	—	26	—
2	50	25 <sup>(6)</sup>	25	17	19	84	60	46	25	25	45	36
2 1/2	65	—	—	—	—	—	—	—	—	—	45	36
3	80	—	—	—	—	—	—	—	—	—	45	36
4	100	—	—	—	—	—	—	—	—	—	45	36

(1) Bolted bonnet only

(2) Welded bonnet only

(3) Only for A105 (carbon) (bolted and welded bonnet) and A182 (stainless F316/F316L) (bolted bonnet only) body material in socket weld, threaded, butt weld or combination weld ends, RF end connections and in pressure classes 150, 300, 600 and 800. (Standard Port Only)

All other materials in pressure classes 150 - 800, refer to the NPS 3/4 (DN 20) design.

For bellows seal valves, refer to the NPS 3/4 (DN 20) design.


(4) 14 Cv for bolted bonnet & 7 Cv for welded bonnet

(5) With seat 1.25" and end-to-end 7.25"

(6) 25 Cv for bolted bonnet & 17 Cv for welded bonnet

**NOTE:** Metric Equivalent of Cv is Kv: Kv = Cv x 0.85

# HOW TO ORDER

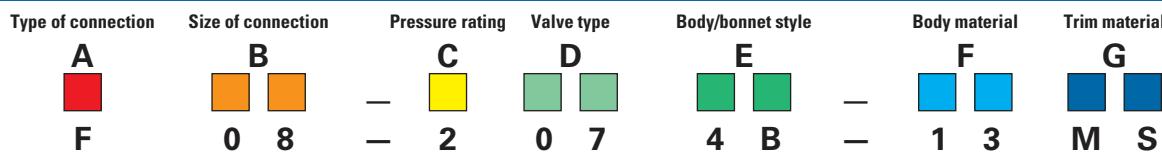

Example: is a NPS 2 (DN 50) 600 Class stainless steel bolted bonnet globe valve with MS trim.

<b>A</b> TYPE OF CONNECTION	
<b>B</b> Butt weld	<b>S</b> Thread NPT
<b>C</b> Combination (socket weld/threaded)	<b>U</b> Undrilled flanges
<b>F</b> Flanged B16.5 (B16.47 series A)	<b>W</b> Socket weld
<b>R</b> Flanged ring joint	<b>X</b> Butt weld (intermediate class)

<b>B</b> SIZE OF CONNECTION	
Customers have the choice of specifying valve size as part of the valve figure number ( <b>B</b> ) using the numbers below, or indicating valve size separately. Sizes shown in NPS (DN)	
<b>EXAMPLES:</b>	
F08-2054B-13MS (valve size is part of figure number)	
2F-2054B-13MS (valve size is shown separately)	
<b>01</b> 1/4 (8)	<b>04</b> 3/4 (20)
<b>02</b> 3/8 (10)	<b>05</b> 1 (25)
<b>03</b> 1/2 (15)	<b>06</b> 1 1/4 (32)
<b>07</b> 1 1/2 (40)	<b>08</b> 2 (50)
<b>10</b> 3 (80)	<b>11</b> 3 1/2 (90)
<b>12</b> 4 (100)	<b>13</b> 5 (125)

<b>C</b> PRESSURE RATING	
<b>0</b> 150	<b>2</b> 600 or 800 API 602
<b>1</b> 300	<b>3</b> 1500
<b>4</b> 2500	<b>6</b> 400
<b>9</b> 2680	<b>8</b> 1690

<b>D</b> VALVE TYPE	
<b>01</b> Flow control	<b>10</b> Continuous blowdown
<b>02</b> Ball check	<b>11</b> Swing check
<b>03</b> Piston check	<b>14</b> Parallel slide
<b>05</b> Conventional port gate	<b>15</b> Instrument
<b>06</b> Full port gate	<b>17</b> IREB gate
<b>07</b> Stop globe	<b>18</b> Extended body gate
<b>08</b> Stop check	<b>21</b> Boiler blowoff
<b>09</b> Needle	<b>22</b> Pressure relief
<b>23</b> Double disc gate	
<b>34</b> Tilting disc check valve	
<b>62</b> Full port ball check	
<b>63</b> Full port piston check	
<b>67</b> Full port stop globe	
<b>68</b> Full port stop check	
<b>69</b> Full port needle	

<b>E</b> BODY/BONNET STYLE	
<b>4</b> Vertical	<b>B</b> Bolted bonnet (forged)
<b>5</b> Angle	<b>D</b> Diaphragm
<b>6</b> Inclined y-pattern	<b>E</b> Extended bonnet (cryogenic)
<b>7</b> Inclined y-pattern bonnetless 45°	<b>R</b> Forged bolted bonnet bellows seal
<b>8</b> Elbow down	<b>S</b> Y-pattern bellows seal (non-rotating stem)
	<b>T</b> All welded bellows seal
	<b>W</b> Welded bonnet
	<b>Y</b> Bonnetless (rotating stem)
	<b>Z</b> Bonnetless (non-rotating stem)

**Note:** Velan valves for **NACE** service (as indicated by figure number and/or description) comply with the metallurgical requirements of the current **NACE MR0103** and **MR0175 / ISO 15156**. Material selection is dependent on the actual environment and it is therefore the equipment End User's responsibility to ensure that the materials are suitable for the intended service. Please contact Velan for any questions regarding the application of our products for **NACE** service.

<b>F</b> BODY MATERIAL				
<b>02</b>	A105	<b>15</b>	S/S F347	<b>25</b> LCB
<b>04</b>	CHR. MOLY F5	<b>16</b>	S/S F304H	<b>26</b> LF2
<b>05</b>	CHR. MOLY F11	<b>18</b>	S/S F321	<b>27</b> LF3/LC3
<b>06</b>	CHR. MOLY F22	<b>19</b>	Monel M35	<b>31</b> LCC
<b>09</b>	CHR. MOLY F9	<b>20</b>	Inconel 625 <sup>(1)</sup>	<b>32</b> S/S F51
<b>10</b>	S/S F316H <sup>(2)(4)</sup>	<b>21</b>	Hastelloy C <sup>(1)</sup>	<b>34</b> F91
<b>11</b>	S/S F304	<b>22</b>	Titanium Gr. 5	<b>35</b> S/S F44 (254SMO)
<b>12</b>	S/S F304L	<b>23</b>	Alloy 20 (CN7M)	<b>36</b> S/S F321H
<b>13</b>	S/S F316 <sup>(3)(4)</sup>	<b>24</b>	LF1	<b>37</b> Incoloy 825 <sup>(1)</sup>
<b>14</b>	S/S F316L <sup>(4)</sup>			

- (1) Must specify grade
- (2) Material Code "10" (F316H) has a minimum carbon content of 0.04% must be used when temperatures are above 1000°F (538°C).
- (3) Material Code "13" (F316) is not suitable for temperatures above 1000°F (538°C).
- (4) Material Codes "10" (F316H), "13" (F316), and "14" (F316L) are dual certified. If dual certification is required, F316 should be procured with a note that the valves should be dual certified with F316L. If this is specified on the order, then the MTR will state that the F316 valve will meet the chemical and mechanical properties of Dual Certified F316L.

<b>G</b> TRIM (standard trims)					
Code	Wedge/disc surface <sup>(1)</sup>	Seat surface <sup>(1)</sup>	Stem	Bellows <sup>(2)</sup> (if applicable)	API Number
<b>MS</b>	CoCr alloy <sup>(3)</sup>	CoCr alloy <sup>(3)</sup>	316/316L	321	16
<b>MY</b>	CF8M or 316	CoCr alloy <sup>(3)</sup>	316/316L	321	12
<b>TS</b>	CoCr alloy <sup>(3)</sup>	CoCr alloy <sup>(3)</sup>	13 CR (410)	321	5
<b>TY</b>	13 CR (410 or CA15)	CoCr alloy <sup>(3)</sup>	13 CR (410)	321	8
<b>NA</b>	13 CR (410 or CA15) HRC 22 max.	CoCr alloy <sup>(3)</sup>	13 CR 410 HRC 22 max.		8 <sup>(5)</sup>
<b>NB</b>	CF8M or 316	CoCr alloy <sup>(3)</sup>	316/316L	321	12 <sup>(5)</sup>
<b>NC</b>	Monel	CoCr alloy <sup>(3)</sup>	Monel	Hastelloy C	11 <sup>(5)</sup>
<b>NE</b>	CoCr alloy <sup>(3)</sup>	CoCr alloy <sup>(3)</sup>	13 CR 410 HRC 22 max.	Inconel 625	5 <sup>(5)</sup>
<b>NF</b>	CoCr alloy <sup>(3)</sup>	CoCr alloy <sup>(3)</sup>	Same as body		
<b>NG</b>	CoCr alloy <sup>(3)</sup>	CoCr alloy <sup>(3)</sup>	316/316L	321	16 <sup>(5)</sup>
<b>AS</b>	CoCr alloy <sup>(3)</sup>	CoCr alloy <sup>(3)</sup>	321	321	
<b>CS</b>	Alloy 20	CoCr alloy <sup>(3)</sup>	Alloy 20		14
<b>HC</b>	Hastelloy C	CoCr alloy <sup>(3)</sup>	Hastelloy C	Hastelloy C	
<b>HM</b>	HF-acid trim	HF-acid trim	HF-acid trim		
<b>MC</b>	CF8M or 316 with CTFE insert <sup>(4)</sup>	CoCr alloy <sup>(3)</sup>	316		12
<b>PA</b>	NOREM	NOREM	630	Inconel 625	
<b>US</b>	CoCr alloy <sup>(3)</sup>	CoCr alloy <sup>(3)</sup>	S/S 616HT		
<b>UY</b>	13 CR (410 or CA15)	CoCr alloy <sup>(3)</sup>	S/S 616HT		
<b>XX</b>	Monel	Monel	Monel		9
<b>XY</b>	Monel	CoCr alloy <sup>(3)</sup>	Monel		11

- (1) Base material is either the same as the body or solid trim at manufacturer's option.
- (2) Bellows material shown as standard, Inconel can be used in lieu of 321 and Hastelloy C in lieu of Inconel, where design and/or pressure class applicable.
- (3) CoCr alloy (Grade 6 or 21) based on material or application at manufacturer's option.
- (4) Inserts may be in seat or wedge at manufacturer's option.
- (5) NACE service valves are supplied with all materials conforming to NACE MR0175. (Including bolting with max. hardness of RC22).

**Note:** CoCr alloy as used throughout this catalog refers to cobalt chrome hardfacing alloys as supplied by Kennametal Stellite™, and other approved manufacturers.

Consult Velan's website at [www.velan.com](http://www.velan.com), for diagnostic troubleshooting and available trim materials.

